

SM-14 SOIL INVESTIGATION

soilmec®
Drilling and Foundation Equipment



SM-14, your next soil investigation rig!

This compact rig is able to perform a wide range of technologies such as micropiles, anchors, soil investigation and consolidations with jet grouting.





Flexible and powerful at your service

- Swiveling boom articulation by cylinder on the base machine enables +/- 35°, slide rotation for 4 sectors at 90°, along with the sliding mast operated by cylinder makes the machine able to perform a wide variety of angles and positions.
- Powered by Tier III Cummins Diesel engines
- Range of rotary heads with different torques and speeds to suit the various drilling needs.



Safety First, No Compromise

Complies with the latest international Safety standards.

- Hydraulic openable cages
- Additional trip wires devices
- Emergency stop buttons
- ROM and SPM operation modes






Excellent versatility and increased manoeuvrability

- Modular mast with motoreducer crowd system.
- Hydraulic/proportional panel mounted on pivotal support arm for drilling operations and wired remote control for tramming.
- The rig is fitted with proportional, hydraulic servo-assisted controls that make operations smooth.
- Featured with Load Sensing System, it has lower running costs and a reduced wear and tear on components.

Flexibility


Working Configuration

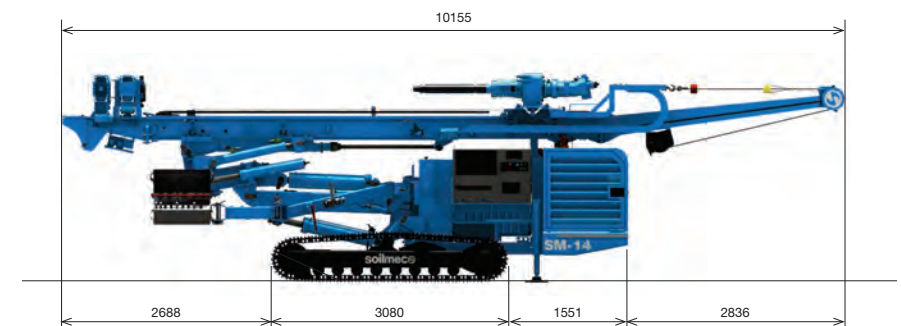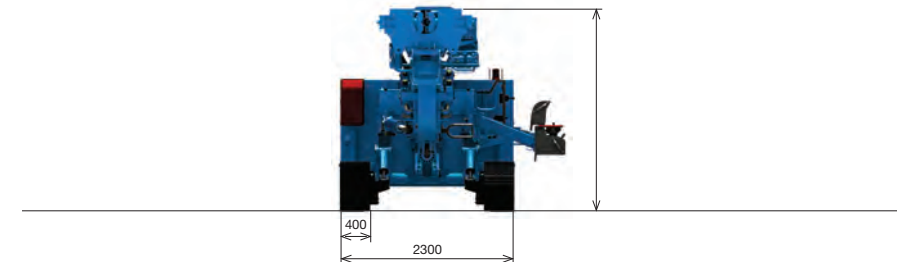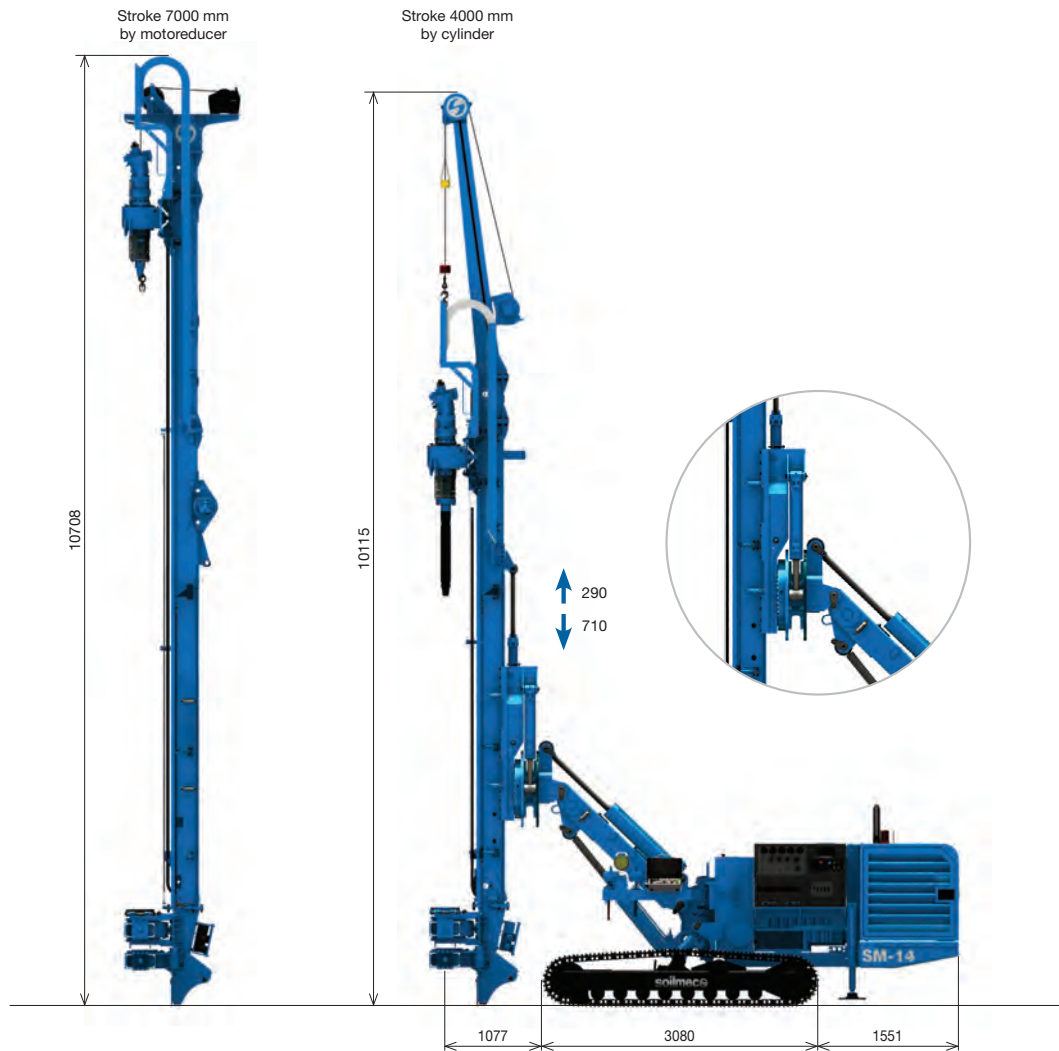

Transport configuration

Width	2300 mm	91 in
Height	2750 mm	108.3 in
Length (stroke 4000/7000)	10155 / 10424 mm	400 / 410 in
Weight (stroke 4000/7000)	14300 / 15000 mm	31526 / 33069 lb

Movements

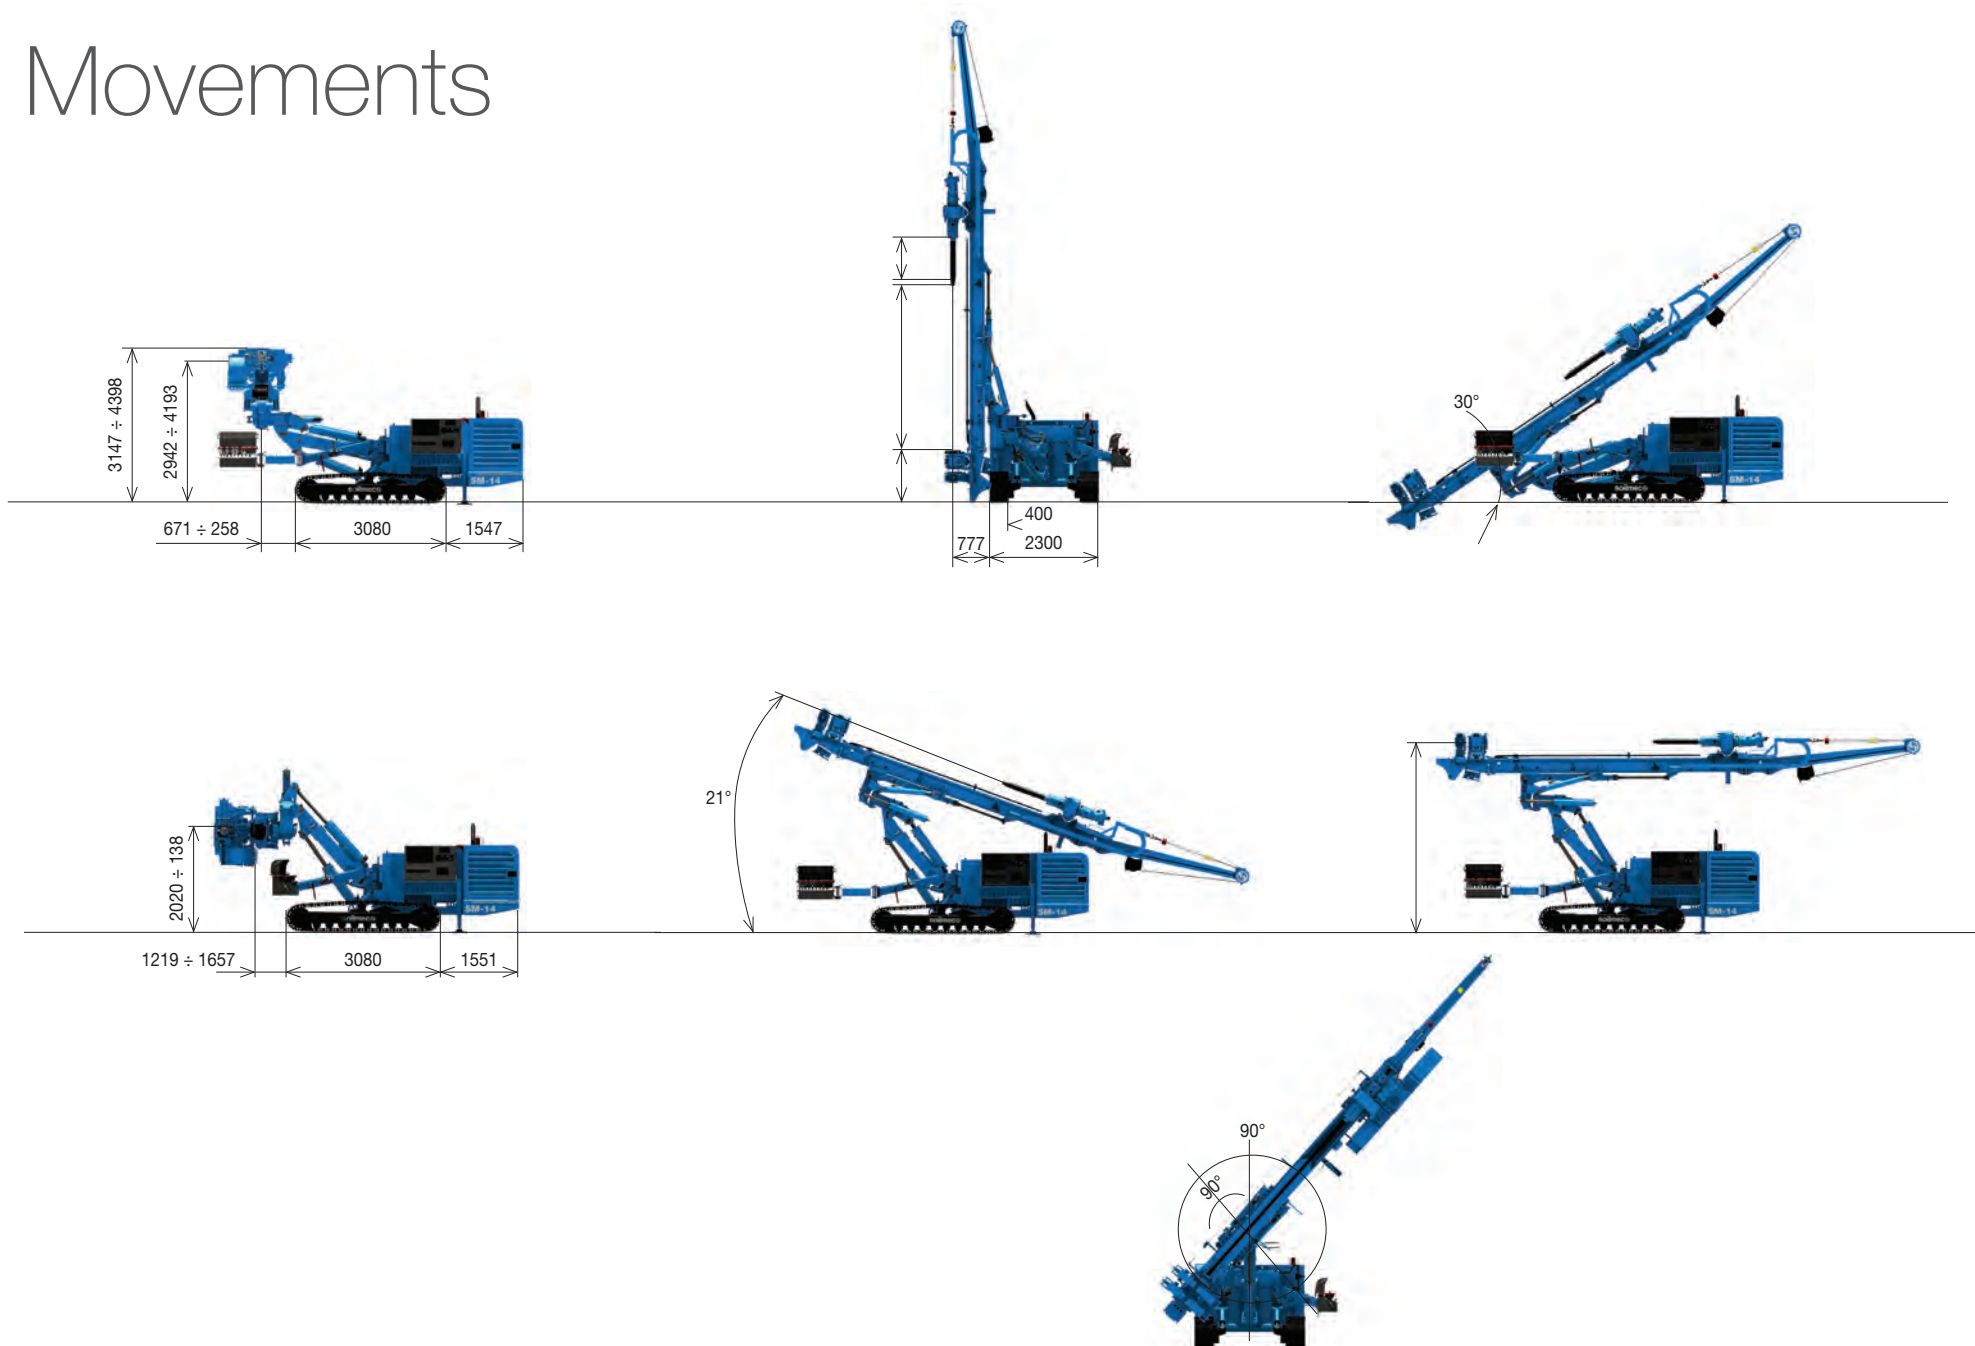

Technical data

Undercarriage



Undercarriage		
Type	pivoting +/- 10°	<i>pivoting +/- 10°</i>
Triple grouse track shoe width	400 mm	<i>15.7 in</i>
Overall length	3080 mm	<i>121.2 in</i>
Overall width (not extendable crawler)	2300 mm	<i>90.6 in</i>
Travelling speed	2,7 km/h	<i>1.68 mph</i>
Average ground pressure	0,070 MPa	<i>10.2 psi</i>
Ground stabilizers	N°2 fixed on rear	<i>N°2 fixed on rear</i>

Diesel engine



Diesel Engine		
Make and model	Cummins QSB 4.5	<i>Cummins QSB 4.5</i>
Emission certification	EU stage III US EPA Tier 3	<i>EU stage III US EPA Tier 3</i>
Diesel engine power rating	119 kW @ 2200 rpm	<i>160 HP @ 2200 rpm</i>
Fuel tank capacity	200 l	<i>53 US gal</i>

Hydraulic system



Hydraulic System		
Main pumps: <i>variable axial pumps</i>	156 + 156 l/min	<i>41.2 + 41.2 US gal/min</i>
Auxiliary pumps: <i>gear pumps</i>	20 l/min	<i>5.3 US gal/min</i>
Hydraulic oil tank capacity	400 l	<i>106 US gal</i>

Rotary head



Rotary	HD 1200V	HD 1200 V	HT1400	HT1400
Gear box type	Variable	<i>Variable</i>	Variable	<i>Variable</i>
Maximum torque	1210 daNm	<i>8924 lbf*ft</i>	1360 daNm	<i>10031 lbf*ft</i>
Maximum rotation	277 rpm	<i>277 rpm</i>	229 rpm	<i>229 rpm</i>
Inner passage	124 mm	<i>4.9 in</i>	124 mm	<i>4.9 in</i>

	HTD 2500G	HTD 2500G	HD 2000	HD 2000
Gear box type	3 speed	<i>3 speed</i>	Variable	<i>Variable</i>
Maximum torque	2550 daNm	<i>18807 lbf*ft</i>	2023 daNm	<i>14921 lbf*ft</i>
Maximum rotation	52 rpm	<i>52 rpm</i>	130 rpm	<i>130 rpm</i>
Inner passage	101,5 mm	<i>4 in</i>	144 mm	<i>6 in</i>

Clamp & hydraulic joint breaker



Clamp & Hydraulic joint breaker		
Nominal size	50 - 315 / 60 - 415 mm	<i>1.96 - 12.4 / 2.4 - 16.3 in</i>
Maximum clamping force	268 kN	<i>58798 lbf</i>
Maximum breaking torque	5060 daNm	<i>37321 lbf*ft</i>
Pull-up extractor clamp force/stroke	100 kN / 400 mm	<i>22481 lbf / 3.9 in</i>

Service winch



Service winch		
Type	Controlled descent	<i>Controlled descent</i>
1° layer line pull	24 kN	<i>5395 lbf</i>
Rope diameter	10 mm	<i>0.39 in</i>
Rope speed	46 m/min	<i>151 ft/min</i>

Hoist & Feed System



Hoist & Feed System				
Type	cylinder	<i>cylinder</i>	motoreducer	<i>motoreducer</i>
Feed Stroke	4000 mm	<i>157.5 in</i>	4300-7000 mm	<i>171.3-275.6 in</i>
Max Hoist pull	89 kN	<i>20008 lbf</i>	99 kN	<i>2256 lbf</i>
Max Feed force	45 kN	<i>10116 lbf</i>	99 kN	<i>2256 lbf</i>
Max speed fast/low	28/6 m/min	<i>92/20 ft/min</i>	28/5 m/min	<i>95/16 ft/min</i>

Jet Grouting

JG system		
Max treatment depth in a single passage (c/w mast extensions)	18 m	<i>59 ft</i>
Hydraulic chuck max handling diameter	114 mm	<i>4.5 in in</i>

Configurations

Pivoting undercarriage	<input checked="" type="radio"/>	Fire extinguisher	<input checked="" type="radio"/>
Upper frame complete with slew ring for 360° rotation	<input checked="" type="radio"/>	Double rotary kit	<input type="radio"/>
Wired remote control for tramping only	<input checked="" type="radio"/>	Jet grouting kit, single fluid	<input type="radio"/>
7" LCD monitor for alarms & diesel engine control and DMS connectivity	<input checked="" type="radio"/>	Jet grouting kit, double fluid	<input type="radio"/>
Hydraulic and proportional controls for all operations	<input checked="" type="radio"/>	Hydraulic chuck complete with gauge pressure and safety device	<input type="radio"/>
Mast extension kits	<input type="radio"/>	Extension for jet grouting	<input type="radio"/>
Auxiliary winch, 5 kN (1124 lbf)	<input checked="" type="radio"/>	Fully hydraulic version prearrangement for Jet Grouting	<input checked="" type="radio"/>
Extractor device for clamps	<input type="radio"/>	Hydraulic pump for foam 30 l/min @ 150 bar (7.9 gallon @ 2176 psi)	<input type="radio"/>
Clamp & breaker 50-315 mm (1.96 - 12.4 in)	<input checked="" type="radio"/>	Triples pump for water flushing 200 l/min @ 80 bar (52.8 gallon @ 1160 psi)	<input type="radio"/>
Clamp & breaker 60-415 mm (2.4 - 16.3 in)	<input type="radio"/>	RH24x Top Hammer Kit and prearrangement	<input type="radio"/>
Fixed boom	<input type="radio"/>	RH32x Top Hammer Kit and prearrangement	<input type="radio"/>
Telescopic boom	<input checked="" type="radio"/>		
Kinematic mechanism - 4 sector	<input checked="" type="radio"/>		
Kinematic mechanism - 90° joint	<input type="radio"/>		
Kinematic mechanism - ± 180° motoreducer	<input type="radio"/>		
Diesel engine EU S tage III - US EPA Tier 3	<input type="radio"/>		
Load sensing hydraulic system	<input checked="" type="radio"/>		
Hydraulic prearrangement for auxiliary pumps	<input checked="" type="radio"/>		
Rotary cradle complete with pads and side shifting movements	<input checked="" type="radio"/>		
Floating system for rotary head	<input checked="" type="radio"/>		
Air/water system and line lubricator for DTH	<input checked="" type="radio"/>		
Foam pump c/w gauge pressure and safety valve	<input type="radio"/>		
Water & mud pumps	<input type="radio"/>		
Centering device	<input checked="" type="radio"/>		
Slow rotation kit and special protective mode	<input checked="" type="radio"/>		
Hydraulic safety cage kit driven by cylinder	<input checked="" type="radio"/>		
Lighting system on mast	<input type="radio"/>		
Washing kit including with hose rewriter & washing lance	<input type="radio"/>		

standard

optional



www.soilmec.it

This brochure has been edited and distributed by SOILMEC Spa. The present document cancels and override any previous ones. This brochure shall not be distributed, reproduced or exhibited without SOILMEC Spa. authorization in accordance with to SOILMEC web site disclaimer condition.

SOILMEC Spa distributes machinery and structures all over the world, supported by SOILMEC Spa subsidiary companies and dealers. The complete Soilmec network list is available on the web site www.soilmec.it

#muddyboots