


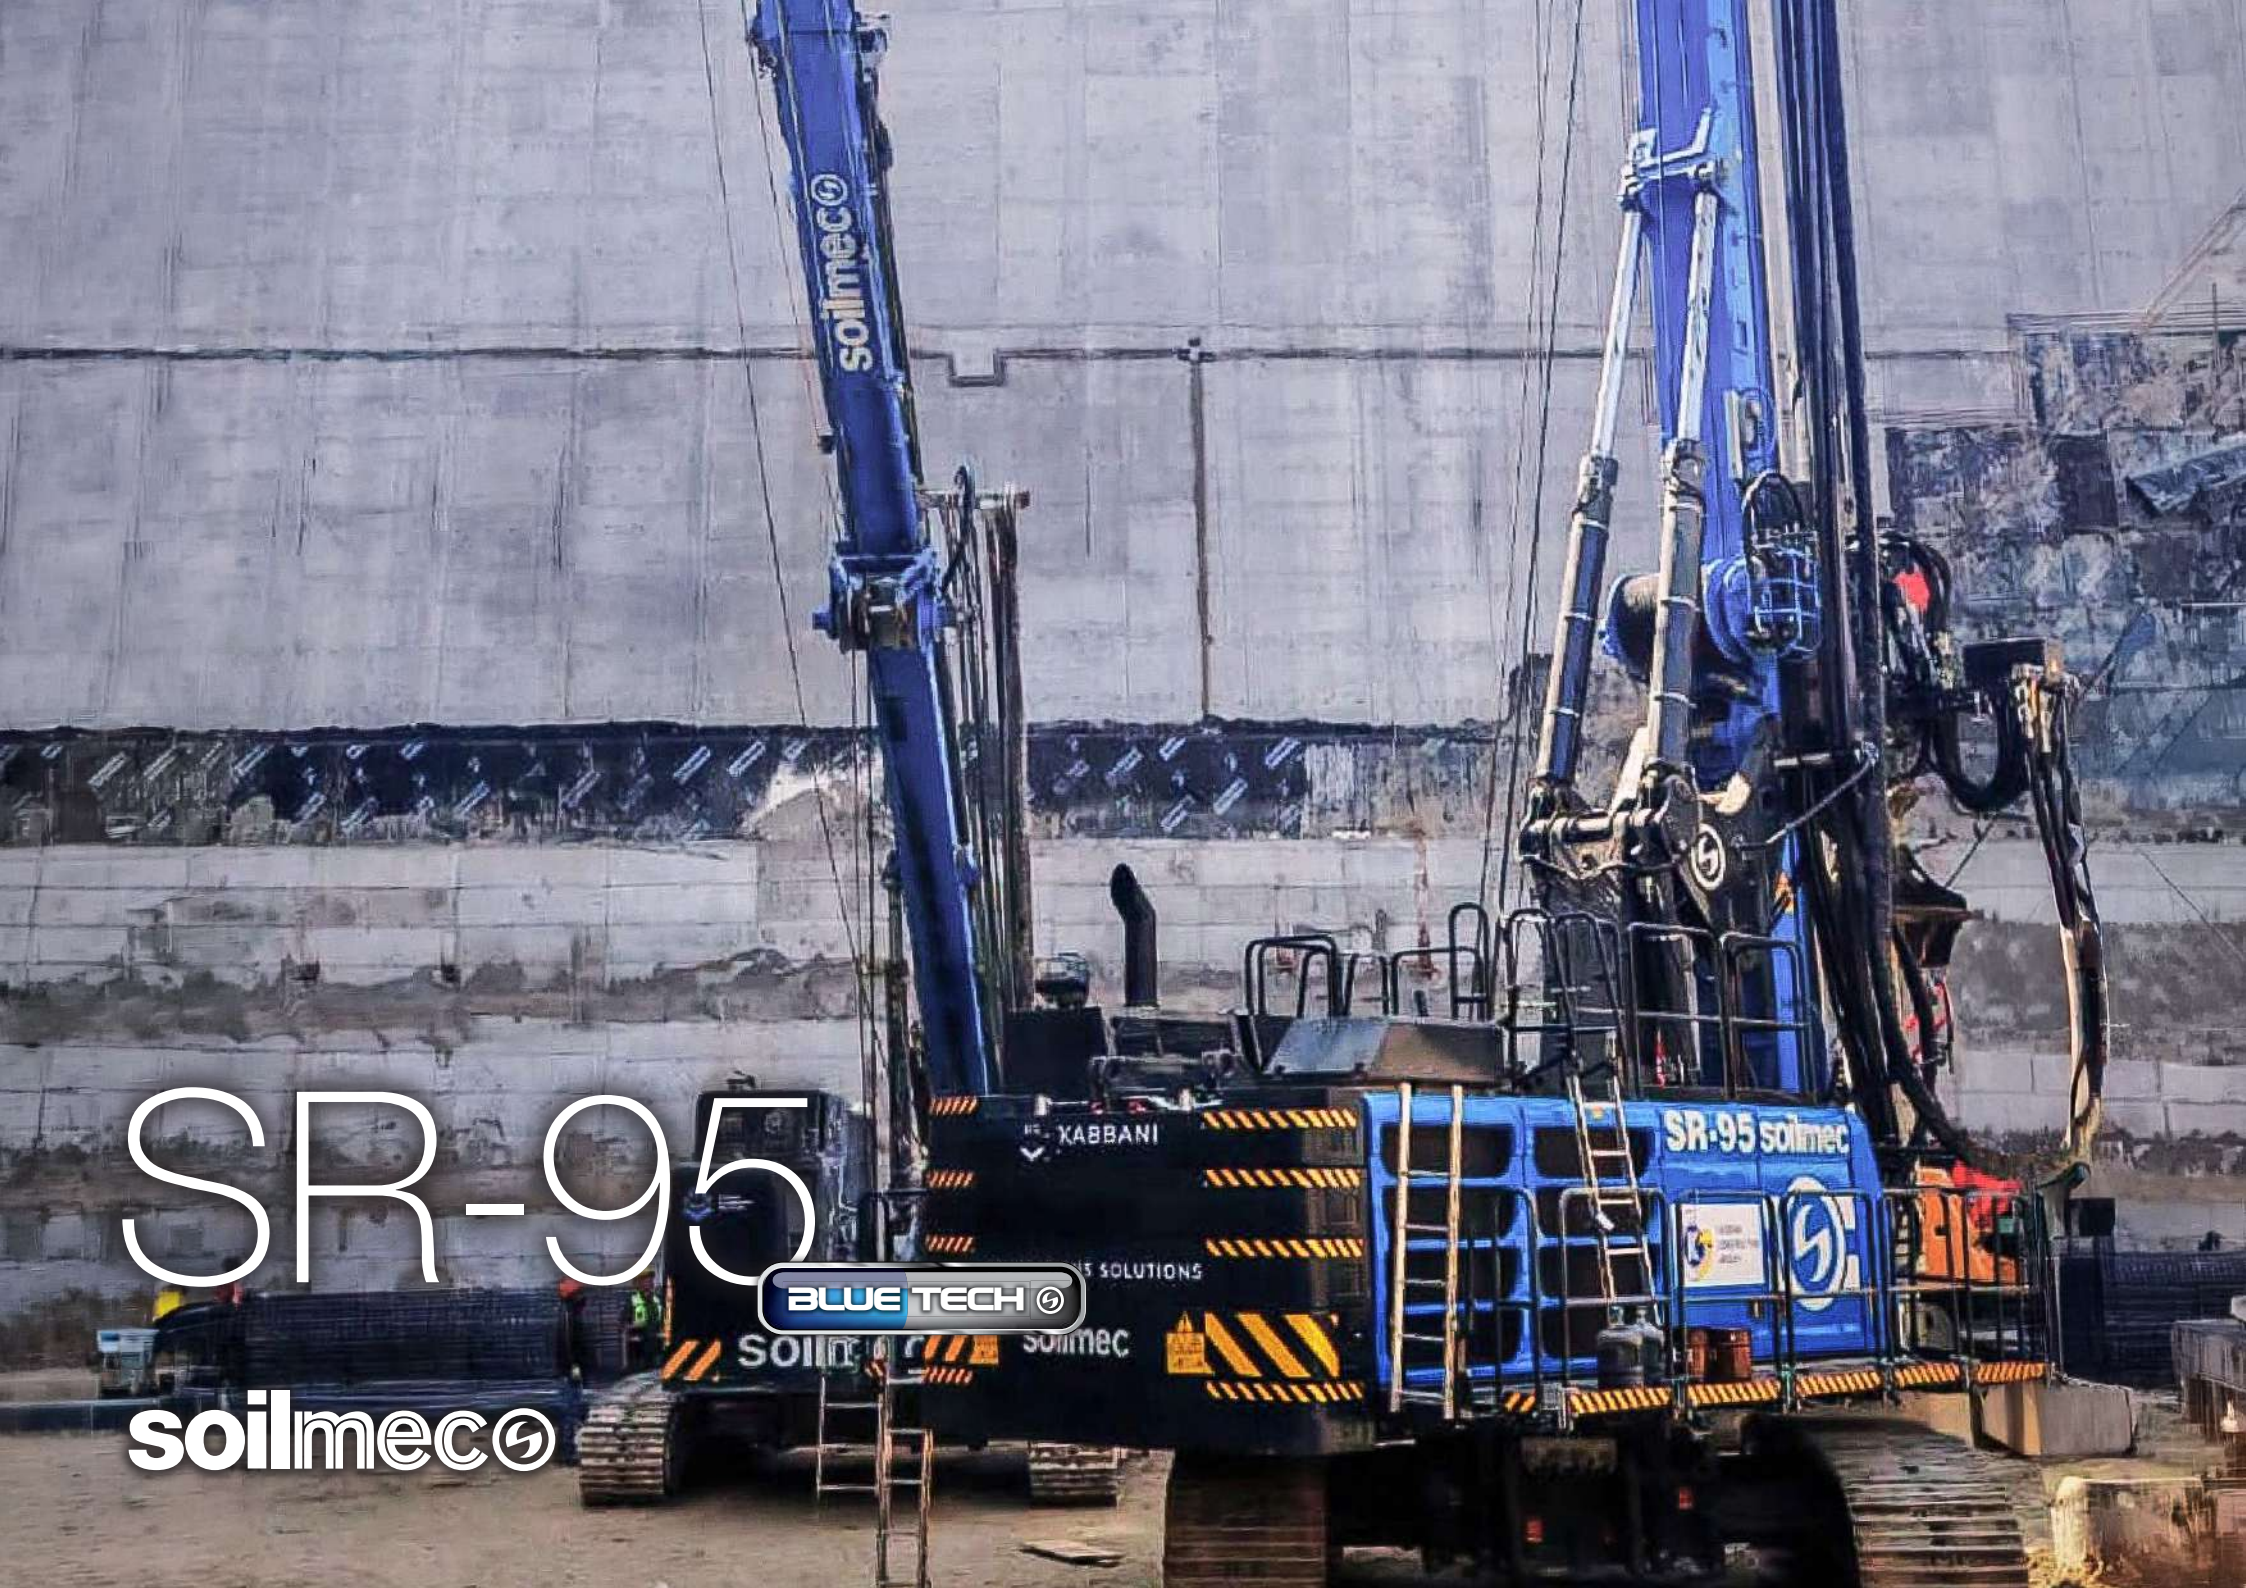

SR-95

soilmec©

BLUE TECH

SOLUTIONS

MR. XABBANI

SR-95 soilmec

Power, when it matters most.

Higher torque. Deeper and larger piles.

- High rotary torque combined with variable drilling axis capability enables execution of deeper foundations and larger diameters with full control.

Powerful engine. Lower consumption.

- Stage V diesel engine with low-idle system and intelligent fan control reduces fuel consumption and noise while maintaining high output.

High-capacity main winch


- The SW350 main winch - also available in single layer version - ensures easier handling of large Kelly bars and delivers outstanding extraction force.


Consistent penetration under load

- High crowd force guarantees continuous drilling efficiency, even in deep and demanding ground conditions.

Designed for heavy-duty reliability

- Engineered to sustain maximum performance over long cycles, ensuring stable and predictable output on site.

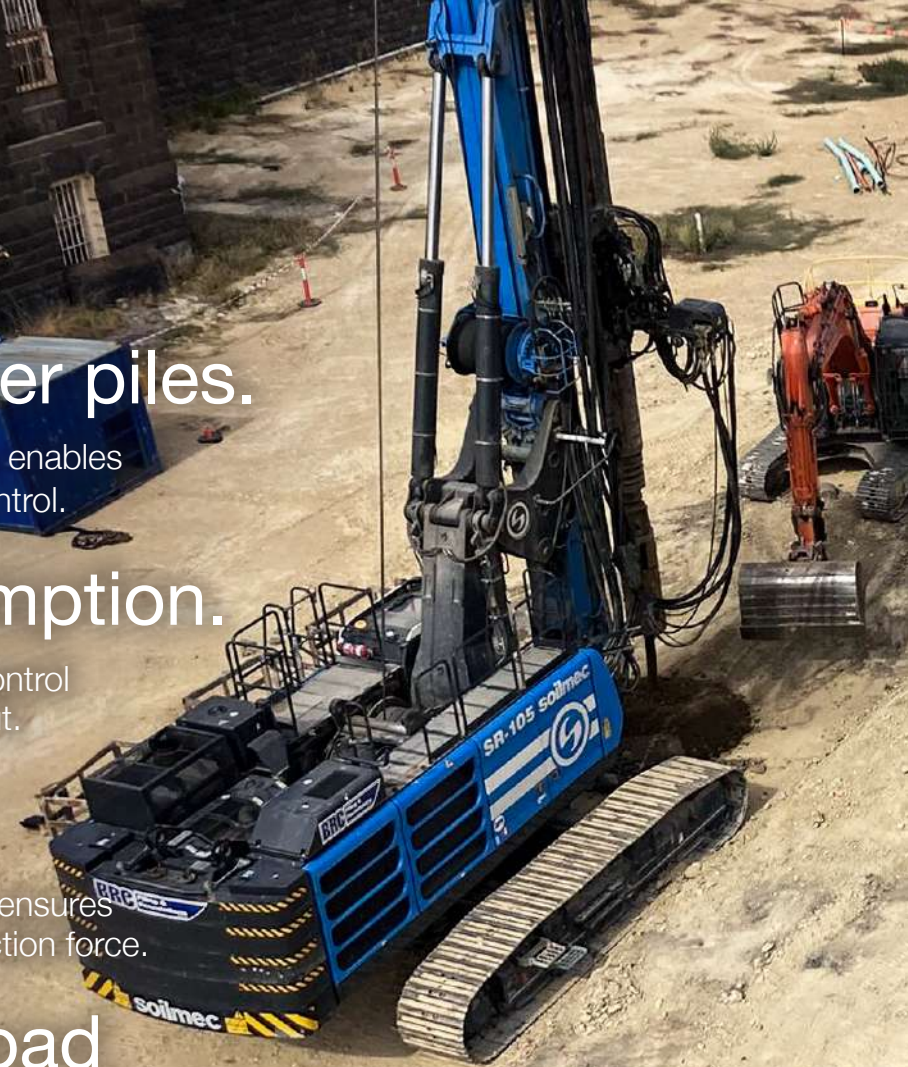


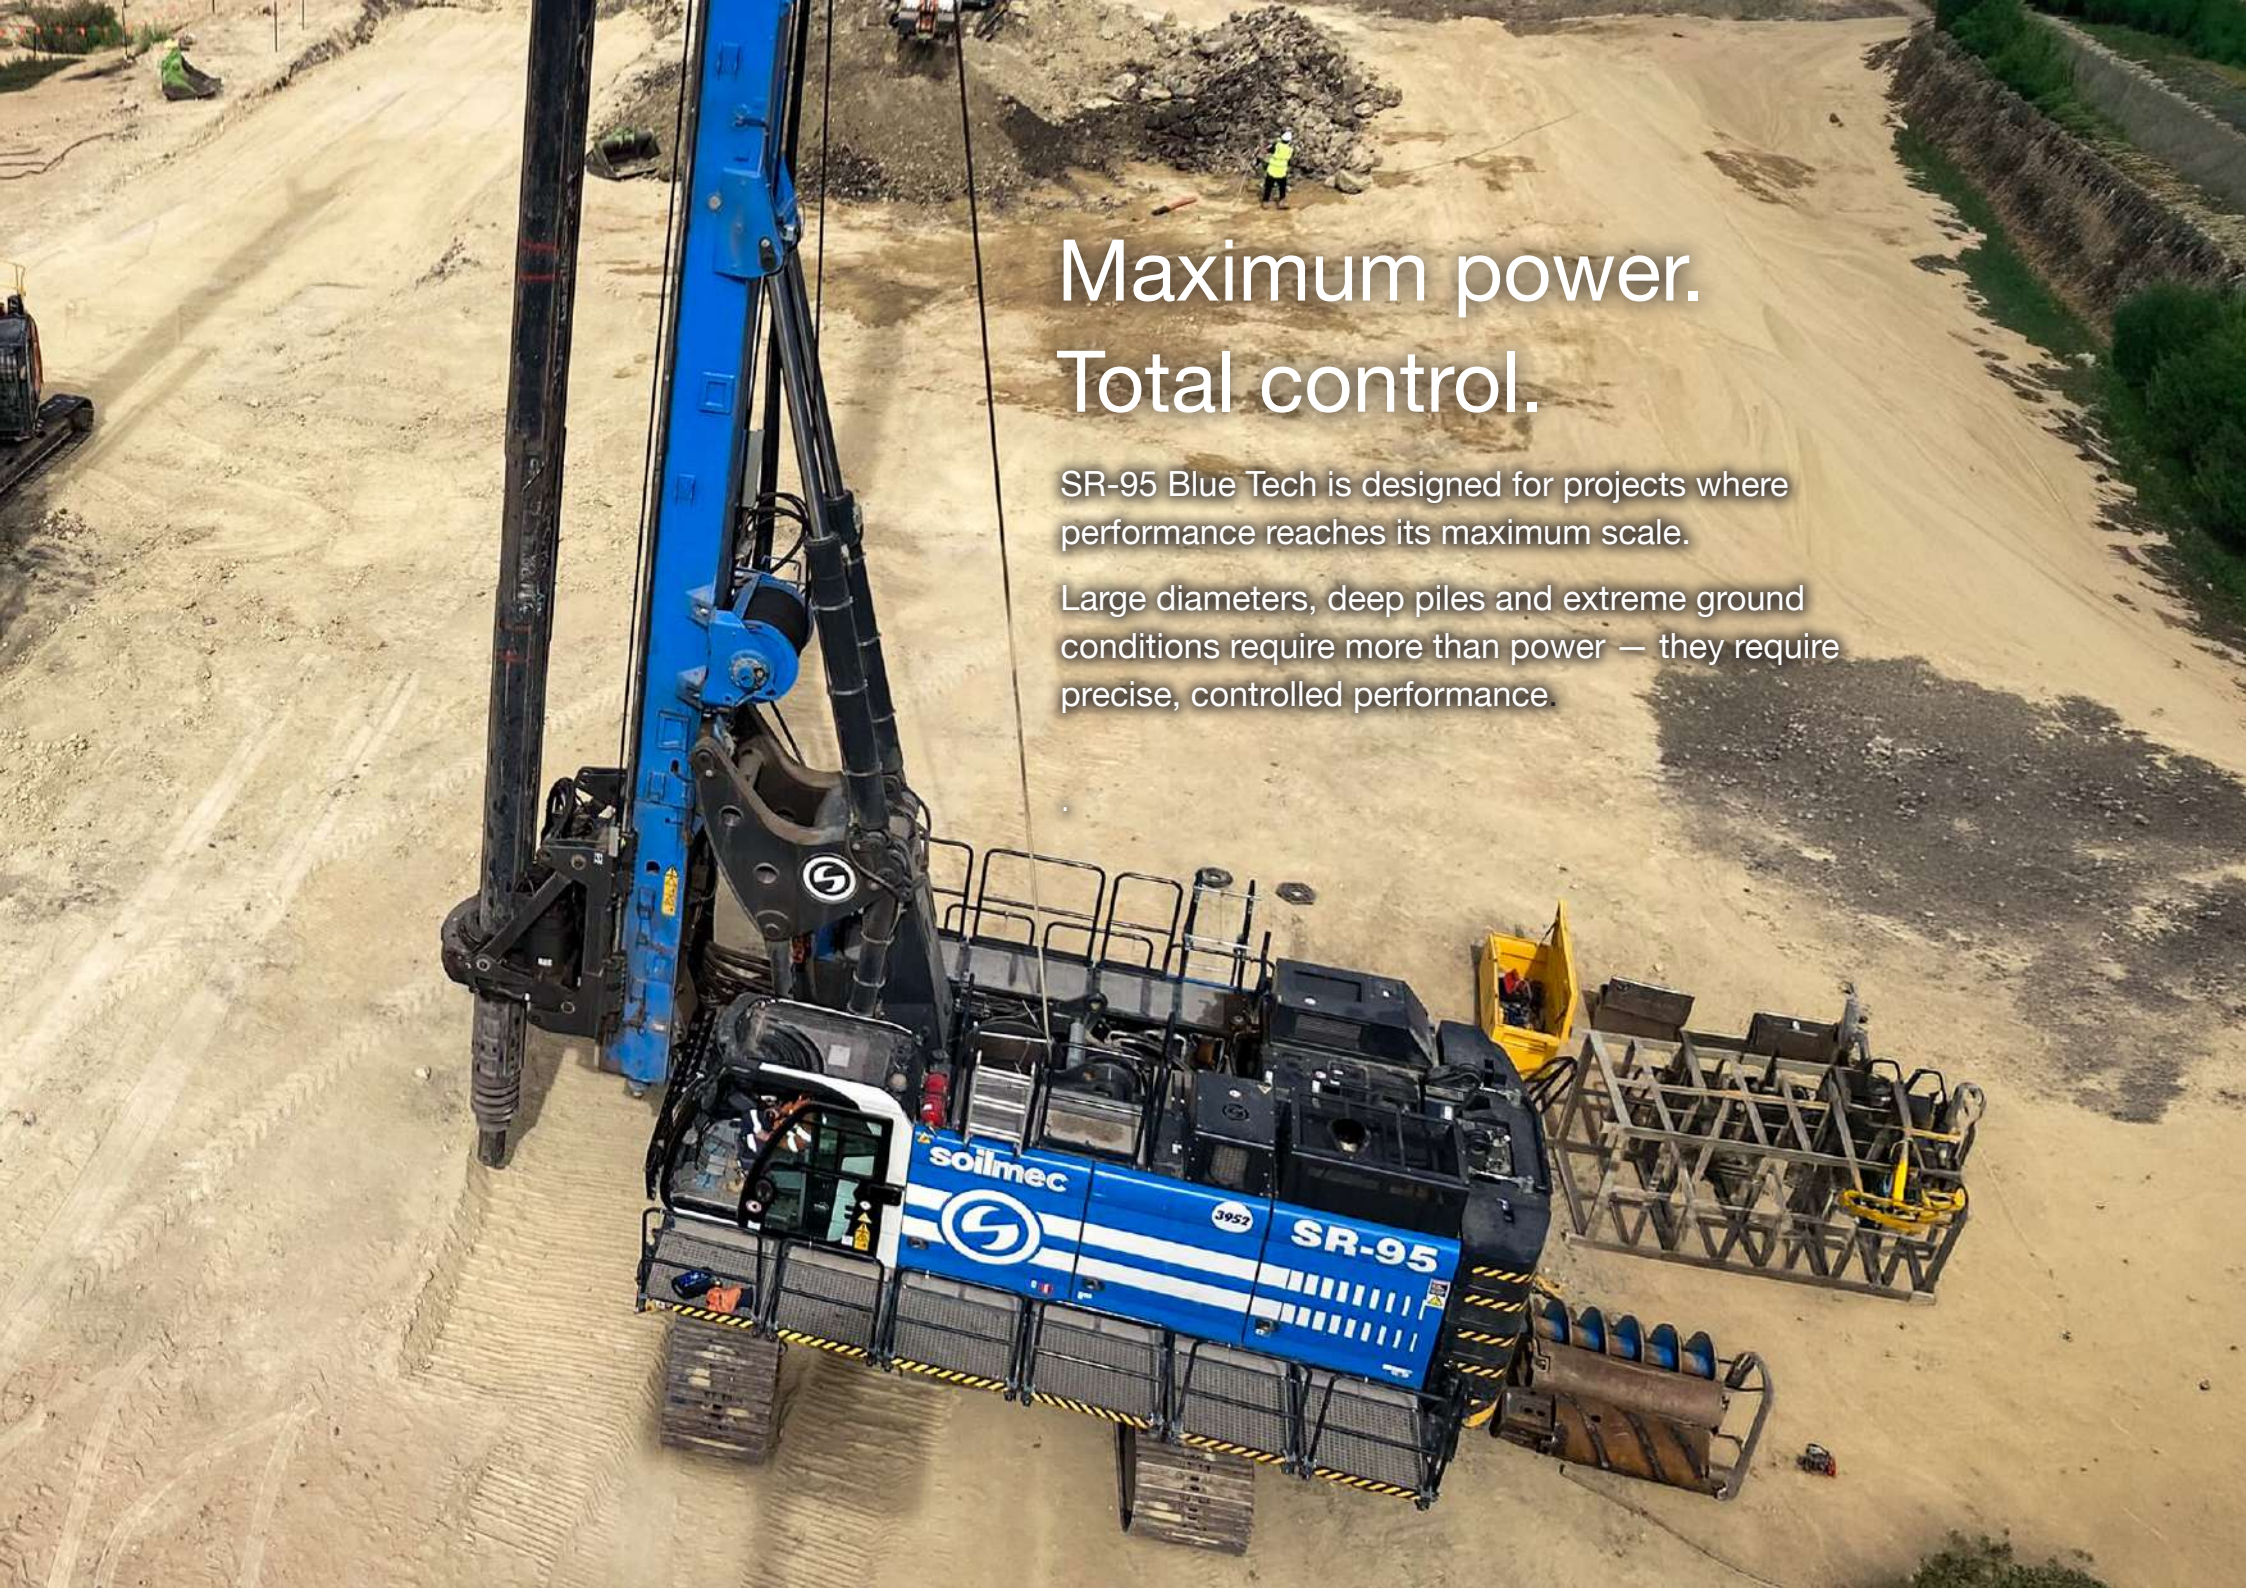

Maximum power. Total control.

SR-95 Blue Tech is designed for projects where performance reaches its maximum scale.

Large diameters, deep piles and extreme ground conditions require more than power — they require precise, controlled performance.

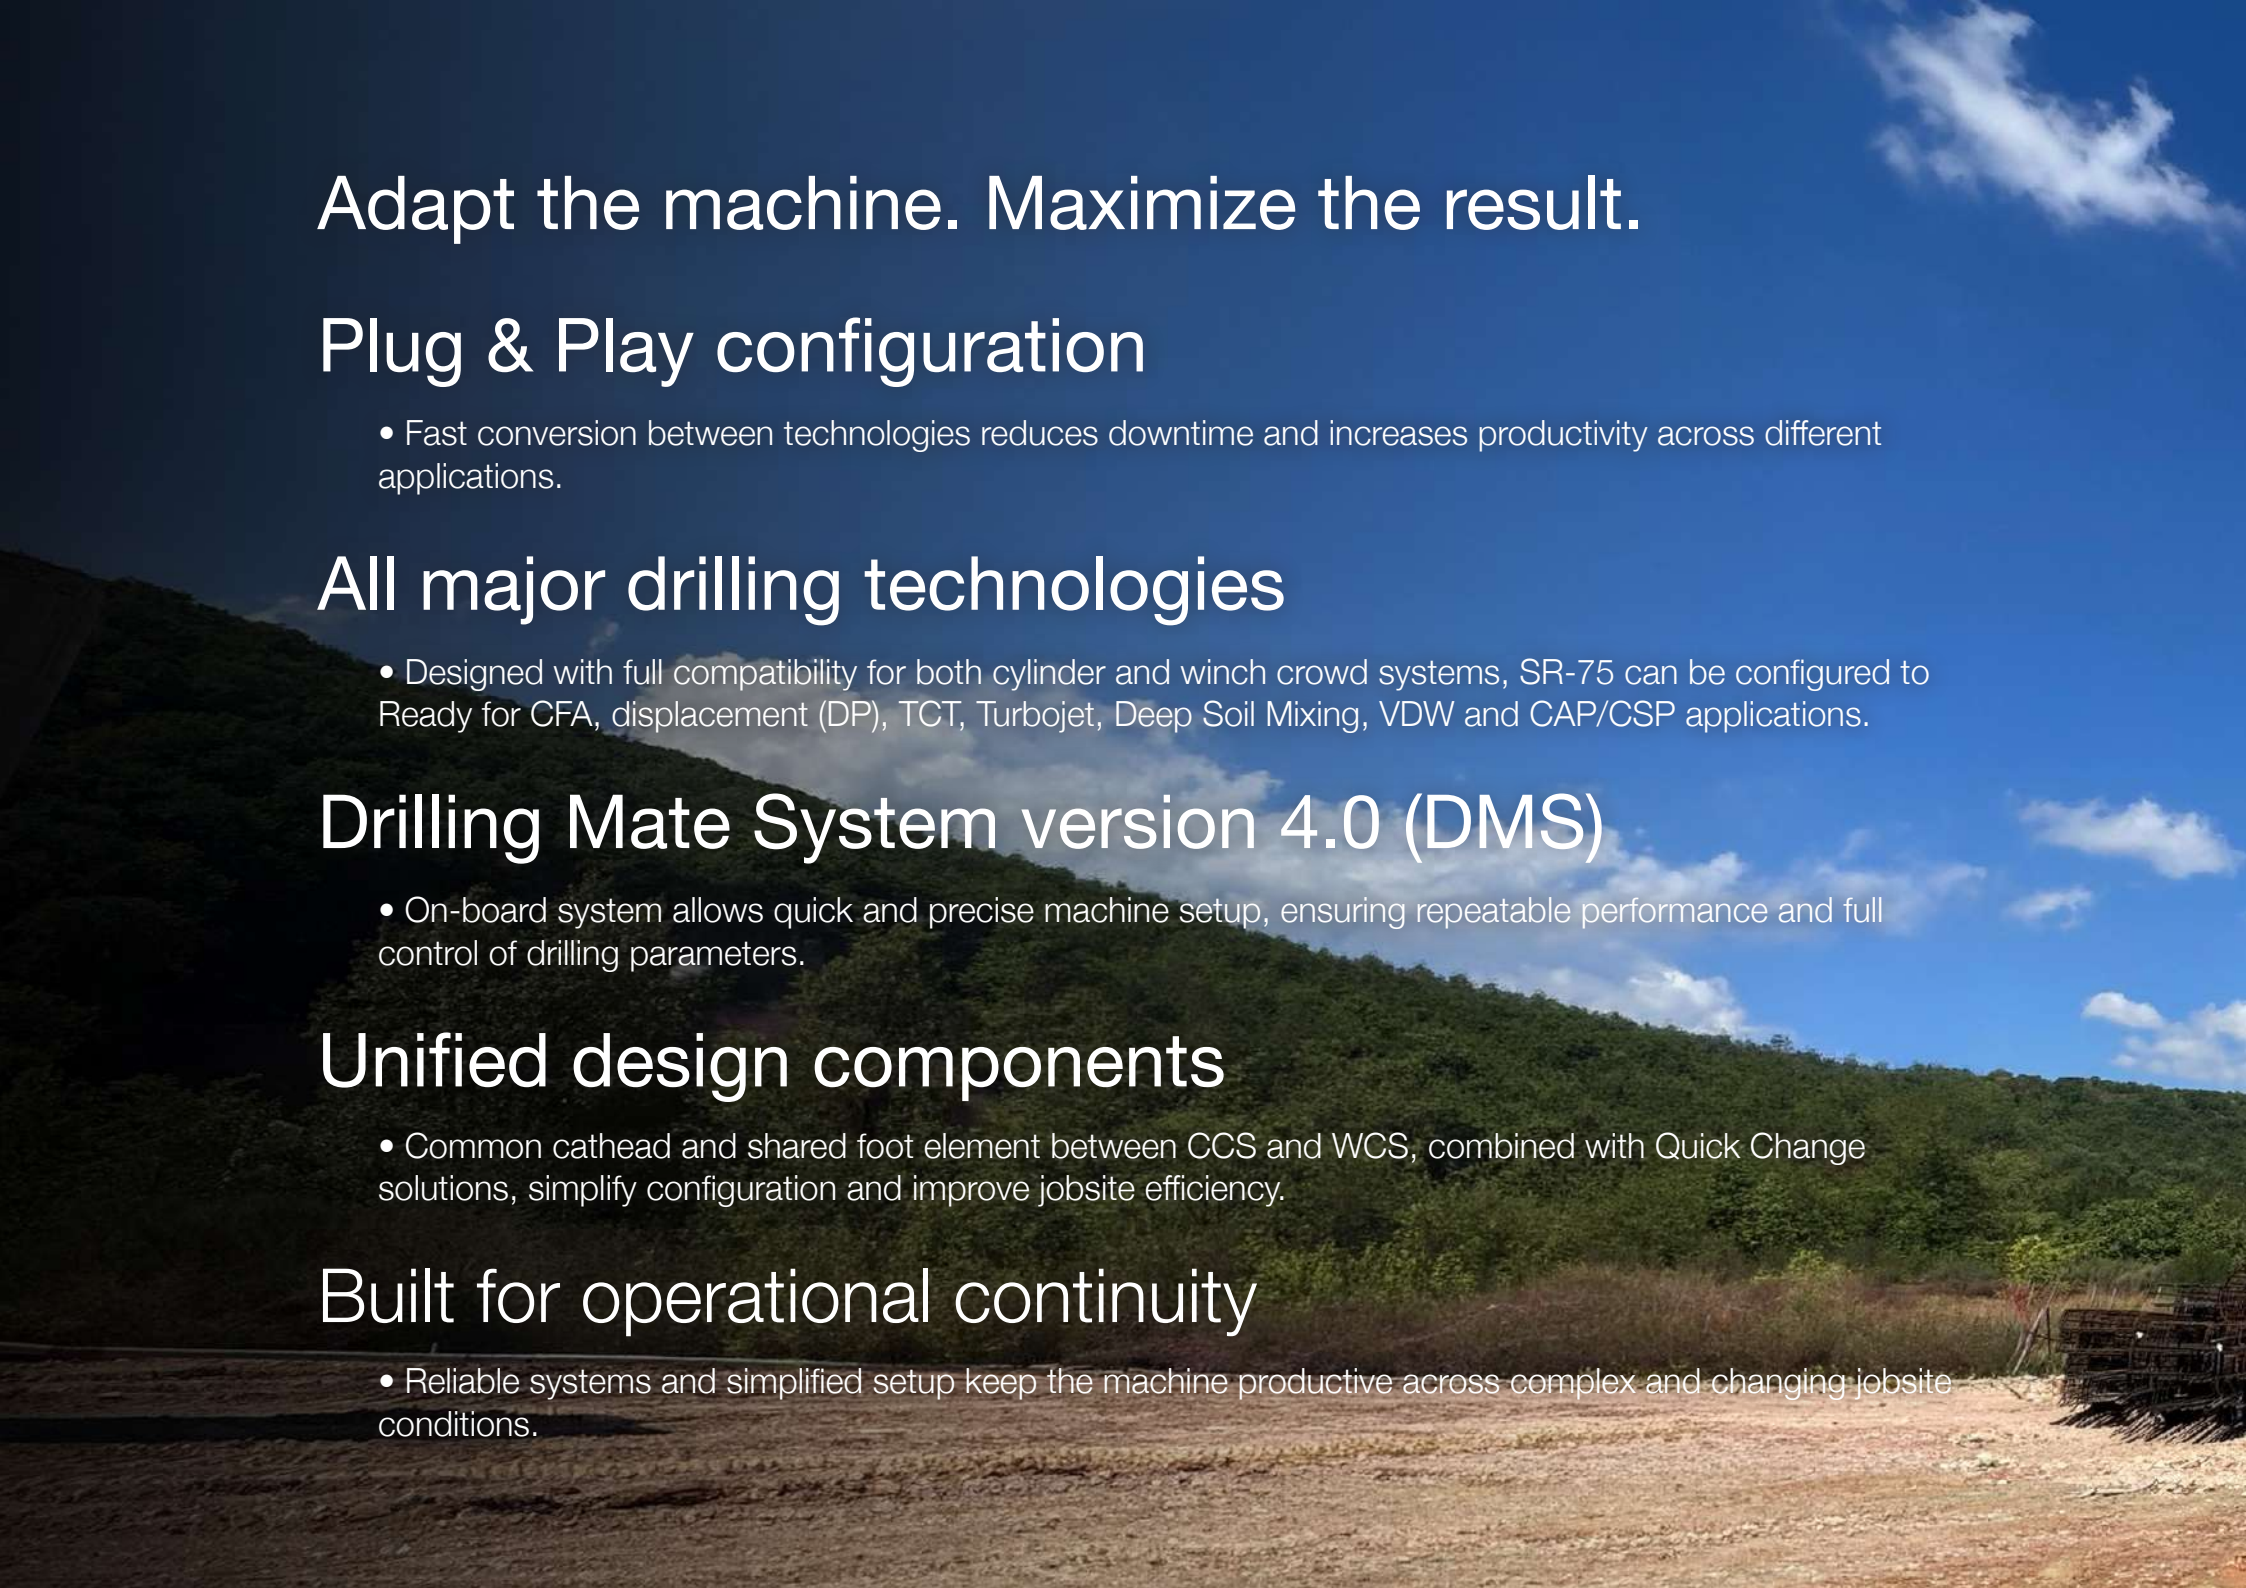

Adapt the machine. Maximize the result.

Plug & Play configuration

- Fast conversion between technologies reduces downtime and increases productivity across different applications.

All major drilling technologies

- Designed with full compatibility for both cylinder and winch crowd systems, SR-75 can be configured to Ready for CFA, displacement (DP), TCT, Turbojet, Deep Soil Mixing, VDW and CAP/CSP applications.

Drilling Mate System version 4.0 (DMS)

- On-board system allows quick and precise machine setup, ensuring repeatable performance and full control of drilling parameters.

Unified design components

- Common cathead and shared foot element between CCS and WCS, combined with Quick Change solutions, simplify configuration and improve jobsite efficiency.

Built for operational continuity

- Reliable systems and simplified setup keep the machine productive across complex and changing jobsite conditions.



One platform. Unlimited applications.


SR-95 Blue Tech is a fully configurable platform designed to adapt quickly to different technologies and jobsite requirements, maximizing utilization and operational efficiency.

Large Diameter Piles

Cylinder Crowd System

Winch Crowd System

Extended version

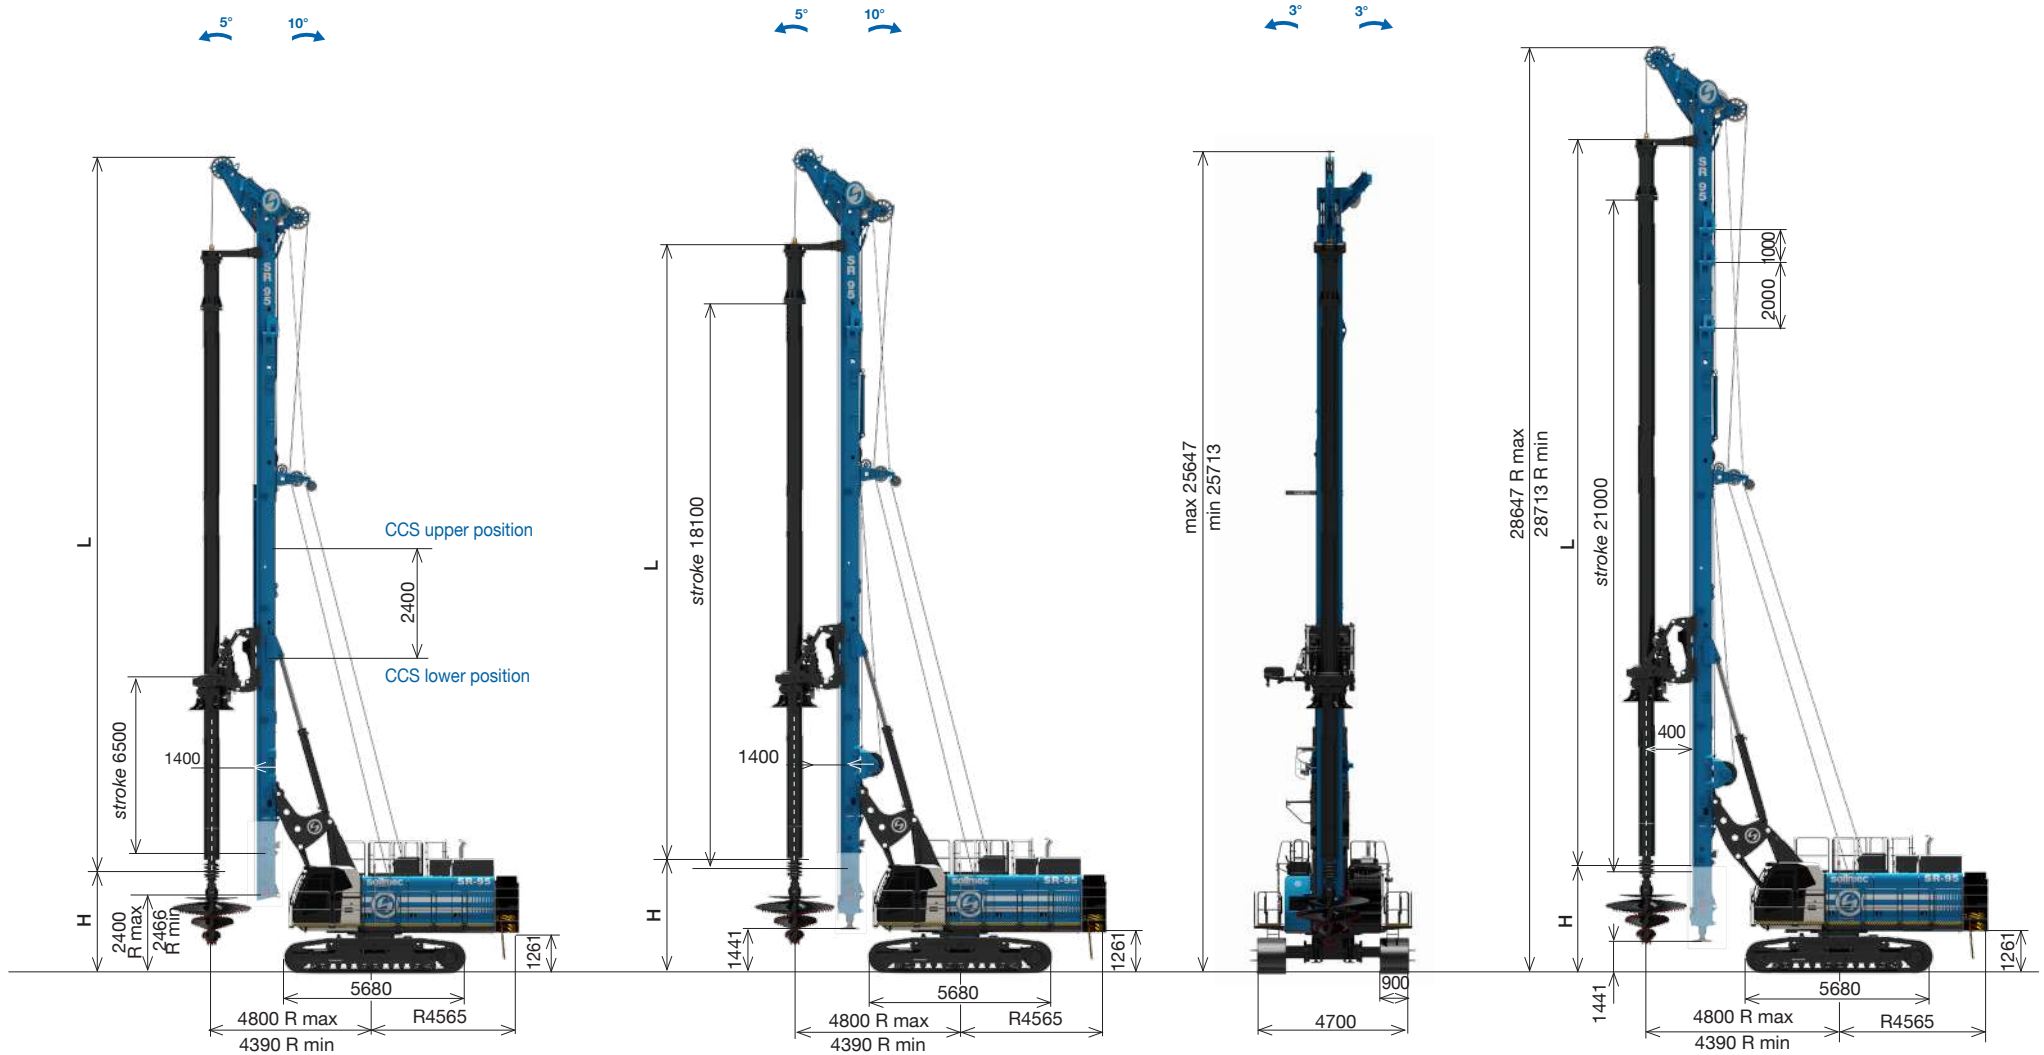

Drawing are not to scale. All technical data are purely indicative and subject to change without notice.

LDP - Large Diameter Piles - CCS version		
Operating weight w/o kelly bar	91240 kg	201150 lb
Max pile diameter (tool in front of the mast)	2100 mm	83 in
Max pile diameter c/w increased drilling axis (tool in front of the mast)	2700 mm	106 in
Max pile diameter w/o lower mast section ¹ (tool below the mast)	3000 mm	118 in
Max pile diameter c/w increased drilling axis & w/o lower mast section ¹ (tool below the mast)	3600 mm	142 in
Working radius ³	4090 - 4800 mm	164 - 192 in
Tail swing radius	4565 mm	180 in
Max pile depth - friction kelly	89 m	292 ft
Max pile depth - locking kelly	70 m	230 ft

LDP - Large Diameter Piles - WCS version		
Operating weight w/o kelly bar	93400 kg	205912 lb
Max pile diameter (tool in front of the mast)	1900 mm	75 in
Max pile diameter c/w increased drilling axis (tool in front of the mast)	2500 mm	98 in
Max pile diameter w/o lower mast section ² (tool below the mast)	3000 mm	118 in
Max pile diameter c/w increased drilling axis & w/o lower mast section ² (tool below the mast)	3600 mm	142 in
Working radius ³	4090 - 4800 mm	164 - 192 in
Tail swing radius	4565 mm	180 in
Max pile depth - friction kelly	89 m	292 ft
Max pile depth - locking kelly	70 m	230 ft

LDP - Large Diameter Piles - extended version ⁴		
Operating weight - w/o kelly bar - CCS version	93800 kg	206794 lb
Operating weight - w/o kelly bar - WCS version	95900 kg	211423 lb
Max pile depth - locking & friction kelly	81,4 - 101,7 m	267 - 334 ft

¹ cylinder crowd in upper position, depth reduced by 2,4 m (7.8 ft)

² rotary stroke and depth reduced by 2,4 m (7.8 ft)

³ working radius with increased drilling axis: 4390 - 4800 mm (173 - 189 in)

⁴ special package with mast extension on request

Kelly bars for LDP

	Kelly type	Kelly dimens.	Drilling ¹ depth		Weight		L Length		H ³				WCS	
			m	ft	t	t(US)	m	ft	CCS Low pos.		CCS High pos.		m	ft
3 pars ²	BL HD	3 x 10,5	27,6	90.6	6,6	7.0	12,0	39.4	8,2	26.9	10,6	34.8	14,1	46.3
	BL HD	3 x 13,5	36,9	121.1	8,0	8.8	15,1	49.5	8,2	26.9	10,6	34.8	11,0	36.1
	BL HD	3 x 15,5	43,2	141.7	8,9	9.8	17,1	56.1	8,2	26.9	9,0	29.5	9,0	29.5
	BL HD	3 x 16,5	46,0	150.9	9,4	10.4	18,1	59.4	8,0	26.2	8,0 ⁴	26.2	8,0	26.2
	BL HD	3 x 18,5	52,3	171.6	10,4	11.8	20,2	66.3	5,9	19.4	5,9 ⁴	19.4	5,9	19.4
	BL HD ⁴	3 x 20	55,9	183.4	11,1	12.2	21,4	70.2	4,7	15.4	-	-	4,7	15.4
4 pars ²⁻³⁻⁶	BL HD ⁴	3 x 21,5	60,9	199.8	11,8	13.0	23,0	75.5	3,1	10.2	-	-	3,1	10.2
	BL HD	4 x 10,5	37,2	122.0	6,9	7.6	12,0	39.4	8,2	26.9	10,6	34.8	14,1	46.3
	BL HD	4 x 13,5	49,5	162.4	8,4	9.3	15,1	49.5	8,2	26.9	10,6	34.8	11,0	36.1
	BL HD	4 x 15,5	57,6	189.0	9,4	10.4	17,1	56.1	8,2	26.9	9,0	29.5	9,0	29.5
	BL HD	4 x 16,5	61,5	201.8	9,9	10.9	18,1	59.4	8,0	26.2	8,0 ⁴	26.2	8,0	26.2
	BL HD	4 x 18,5	69,9	229.3	11,0	12.1	20,2	66.3	5,9	19.4	5,9 ⁴	19.4	5,9	19.4
5 pars ²	BL HD ⁴	4 x 19,5	74,0	242.8	11,5	12.7	21,1	69.2	5,0	16.4	-	-	5,0	16.4
	BL HD ⁴	4 x 20	74,7	245.1	11,7	12.9	21,4	70.2	4,7	15.4	-	-	4,7	15.4
	BL HD ⁴	4 x 21,5	81,4	267.1	12,5	13.8	23,0	75.5	3,1	10.2	-	-	3,1	10.2
	FR HD	5 x 10,5	46,6	152.9	7,7	8.4	12,0	39.4	8,2	26.9	10,6	34.8	14,1	46.3
	FR HD	5 x 13,5	62,4	204.7	9,5	10.5	15,1	49.5	8,2	26.9	10,6	34.8	11,0	36.1
	FR HD	5 x 15,5	72,3	237.2	10,8	11.9	17,1	56.1	8,2	26.9	9,0	29.5	9,0	29.5
5 pars ²	FR HD	5 x 16,5	77,0	252.6	11,4	12.6	18,1	59.4	8,0	26.2	8,0 ⁴	26.2	8,0	26.2
	FR HD	5 x 18,5	87,5	287.1	12,7	14.0	20,2	66.3	5,9	19.4	5,9 ⁴	19.4	5,9	19.4
	FR HD ⁴	5 x 19	88,9	291.7	13,0	14.3	20,4	66.9	5,7	16.4	5,7 ⁴	16.4	5,7	16.4
	FR HD ⁴	5 x 20	94,2	309.1	13,6	15.0	21,4	70.2	4,7	15.4	-	-	4,7	15.4
	FR HD ⁴	5 x 21,5	101,7	333.7	14,6	16.0	22,9	75.1	3,2	10.2	-	-	3,2	10.2

¹ drilling depth is calculated with kelly bar c/w stub 200x200 & drilling tool 1500 mm (4.9 ft) long;
drilling depth is reduced by 2.4 m (7.8 ft) without lower mast section or CCS in upper position;
drilling depth is reduced by 0.1 m (0.33 ft) with increased drilling axis.

² friction type is also available with the same dimension


³ rotary torque derated

⁴ available only c/w 3 m (9.8 ft) mast extension kit

⁵ clearance c/w 3 m (9.8 ft) mast extension kit.


⁶ data referred to kelly "full depth" type; available "full torque" type..

CFA / DP / TJ applications

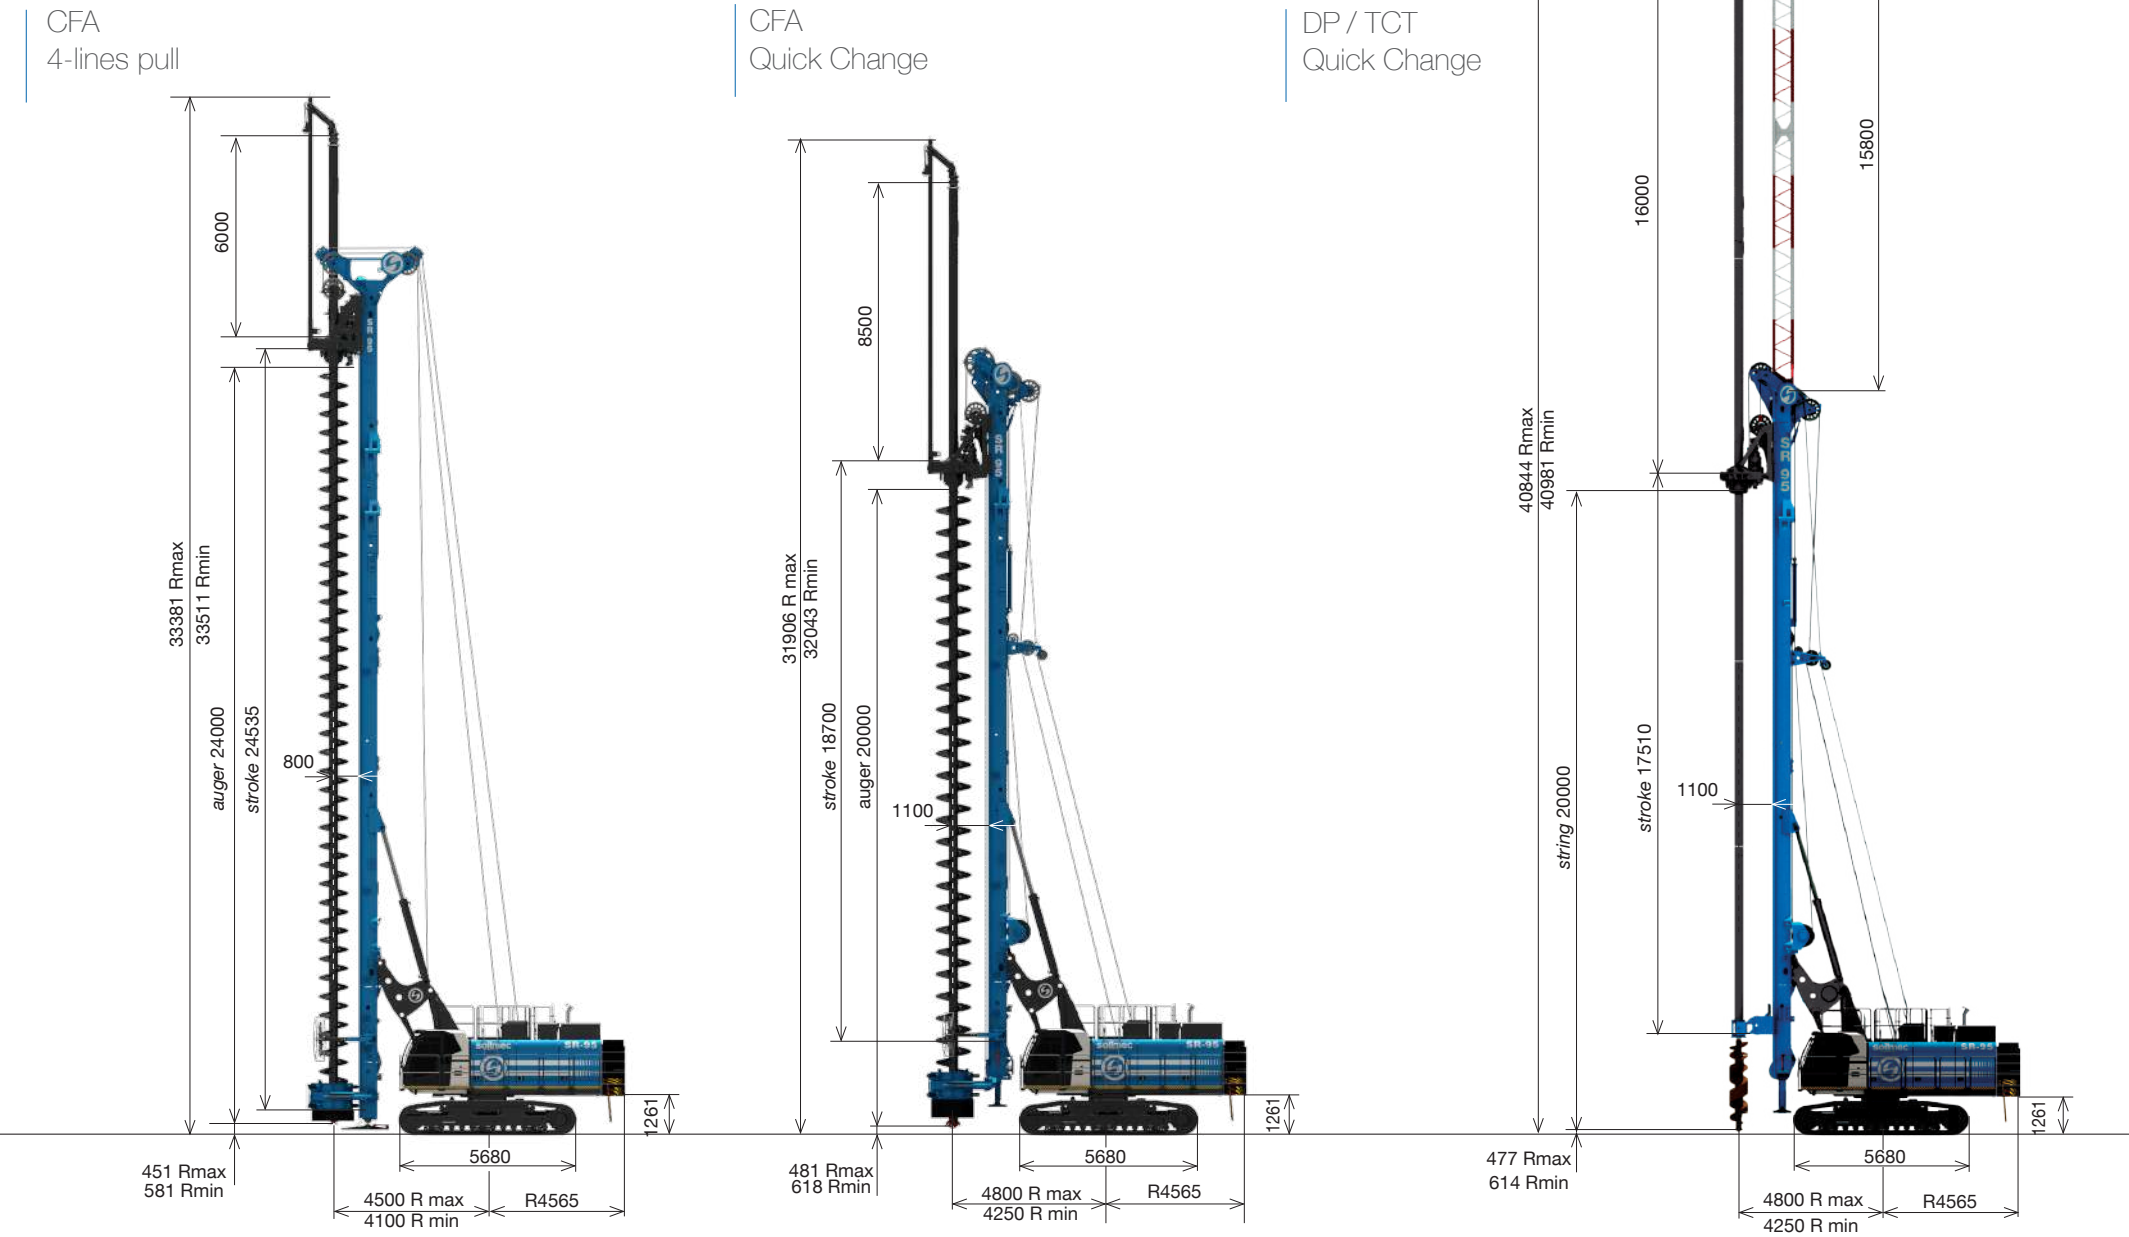

Drawing are not to scale. All technical data are purely indicative and subject to change without notice.

TJ
Quick Change

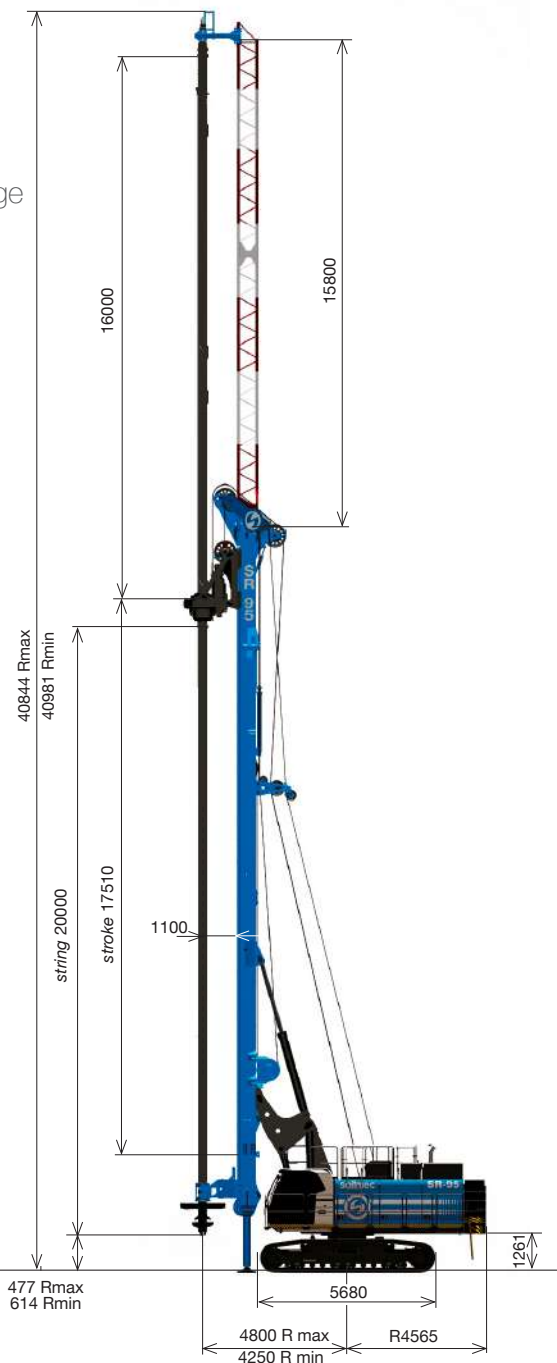

CFA - Continuous Flight Auger - 4-lines pull		standard version		extended version ³	
Operating weight (c/w 6 m - 20 ft sleeve extension, w/o auger)	96000 kg	211644 lb	96500 kg	212746 lb	
Max pile diameter	1200 mm	47 in	1200 mm	47 in	
Max length of auger	24 m	79 ft	26 m	85 ft	
Max length of sleeve extension	8,5 m	28 ft	8,5 m	28 ft	
Max pile depth (c/w 8,5 m - 28 ft sleeve extension) ¹	32,5 m	107 ft	34,5 m	113 ft	
Nominal extraction force	1110 kN	249534 lbf	1110 kN	249534 lbf	
Additional crowd force on auger ²	100/484 kN	22481/108806 lbf	100 / 484 kN	22481/108806 lbf	
CFA - Continuous Flight Auger - Quick change		standard version		extended version ³	
Operating weight (c/w 8,5 m - 28 ft sleeve extension, w/o auger)	96700 kg	213187 lb	98800 kg	217817 lb	
Max pile diameter	1200 mm	47 in	1200 mm	47 in	
Max length of auger	20 m	66 ft	23 m	75 ft	
Max length of sleeve extension	8,5 m	28 ft	8,5 m	28 ft	
Max pile depth (c/w 8,5 m - 28 ft sleeve extension) ¹	26,5 m	87 ft	29,5 m	97 ft	
Nominal extraction force	1000 kN	224805 lbf	1000 kN	224805 lbf	
Additional crowd force on auger	484 kN	108806 lbf	484 kN	108806 lbf	
CFA - Continuous Flight Auger - Direct Quick change		standard version		extended version ³	
Operating weight (c/w 8,5 m - 28 ft sleeve extension, w/o auger)	96500 kg	212746 lb	98600 kg	217376 lb	
Max pile diameter	1200 mm	47 in	1200 mm	47 in	
Max length of auger	20 m	66 ft	23 m	75 ft	
Max length of sleeve extension	8,5 m	28 ft	8,5 m	28 ft	
Max pile depth (c/w 8,5 m - 28 ft sleeve extension) ¹	26,5 m	87 ft	29,5 m	97 ft	
Nominal extraction force	484 kN	108806 lbf	484 kN	108806 lbf	
Additional crowd force on auger	484 kN	108806 lbf	484 kN	108806 lbf	
DP - Displacement pile - Quick change ⁴		standard version		extended version ³	
Max recommended DP/TCT pile diameter	600 mm	24 in	600 mm	24 in	
Max recommended TCT pile diameter	800 mm	31.50 in	800 mm	31.50 in	
Max length of string	20 m	66 ft	23 m	75 ft	
Max pile depth w/o lattice boom extension c/w 8,5 m (27.8 ft) string extension	25,5 m	84 ft	28,5 m	94 ft	
Lattice boom extension length	16 m	52 ft	n.a.	n.a.	
Max pile depth c/w lattice boom extension	33 m	108 ft	n.a.	n.a.	
TJ - Turbo jet - Quick change ⁴		standard version		extended version ³	
Max recommended TJ pile diameter	1900 mm	75 in	1900 mm	75 in	
Max length of string	20 m	66 ft	23 m	75 ft	
Max pile depth w/o lattice boom extension c/w 6 m (19,6 ft) string extension	23 m	75 ft	26 m	85 ft	
Lattice boom extension length	16 m	52 ft	n.a.	n.a.	
Max pile depth c/w lattice boom extension	33 m	108 ft	n.a.	n.a.	


¹ depth reduced by 1,5 m (4.9 ft) with hydraulic auger cleaner

² depth reduced by 0,2 m (0.66 ft) with 100 kN - by 1,4m (4.5 ft) with 484 kN


³ special package with mast extension on request

⁴ DP/TCT and TJ are also available with 4-lines pull version

CSP / VDW applications

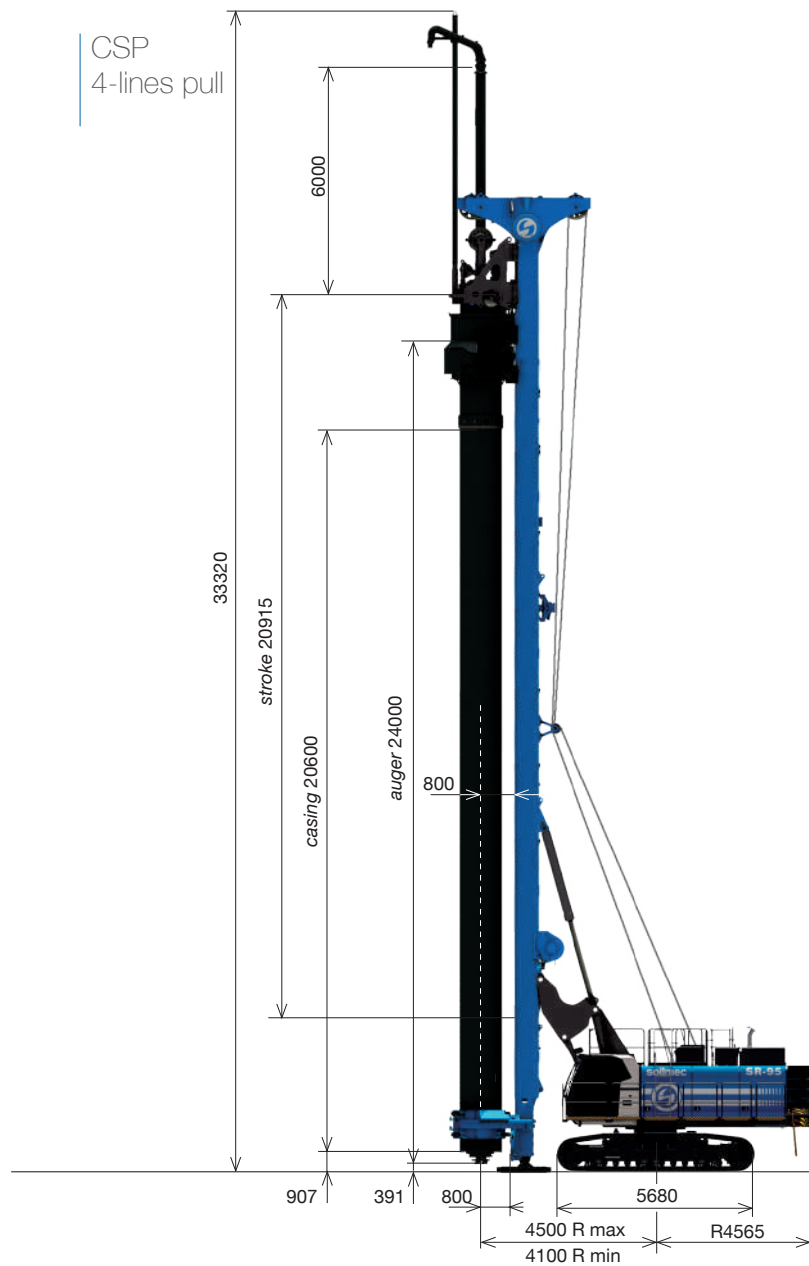

VDW
Quick change

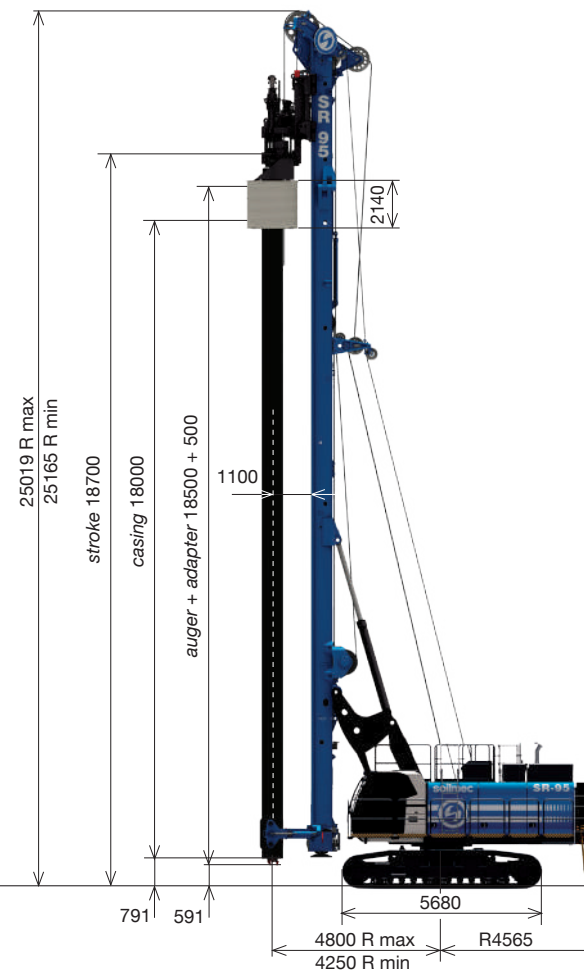

CSP - Cased secant piles - 4-lines pull ¹		
Max pile diameter ²	800 / 1000 mm	31.5 / 39.1 in
Max augered depth (c/w 6 m - 19.7 ft auger extension)	26 m	85 ft
Max cased depth	19,6 m	64 ft
Auger max torque (intermittent)	250 kNm	184387 lbf*ft
Max auger speed rotation	26,3 rpm	25.4 rpm
Auger pull up/down	1110 / 332 kN	249534 / 74635 lbf
Casing max torque (intermittent)	334 kNm	246346 lbf*ft
Max casing speed rotation	10 rpm	10 rpm
Casing pull up/down ³	816 / 484 kN	183441 / 108806 lbf

VDW 2010 - Cased secant piles - Quick change	standard version		extended version ³	
Operating weight (w/o auger and casing)	95700 kg	209437 lb	97900 kg	214287 lb
Max pile diameter ²	800 mm	31.50 in	600 / 800 mm	23.6 / 31.52 ft
Max augered depth w/o auger cleaner	18 m	59 ft	21 m	69 ft
Max cased depth w/o auger cleaner	17,8 m	58 ft	20,8 m	68 ft
Casing max torque	203 kNm	147510 lbf*ft	203 kNm	147510 lbf*ft
Max casing speed rotation	18 rpm	20 rpm	18 rpm	20 rpm
Auger max torque	101,4 kNm	73755 lbf*ft	101,4 kNm	73755 lbf*ft
Max auger speed rotation	37,9 rpm	40 rpm	37,9 rpm	40 rpm
VDW pull up/down	850 / 484 kN	191084 / 108806 lbf	850 / 484 kN	191084 / 108806 lbf
Max stroke between casing and auger	500 mm	20 in	500 mm	20 in

¹ 17,3 t (30140 lb) counterweight is required

² special undercarriage required

³ special package with mast extension on request




The SR-95 Blue Tech has a very wide offer for the cased augered piles technology.

The rig can be fitted with the "classic" CAP/CSP system developed by Soilmec or with the new VDW system.


The CAP/CSP system, with the machine in 4-lines pull version, enables you to get the higher performance thanks to the independent rotaries and a very high extraction force.

The VDW system ensure an easy conversion from quick change and allows a front of wall minimum distance.

Rotary

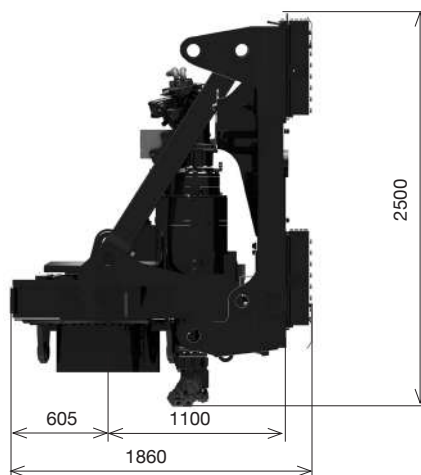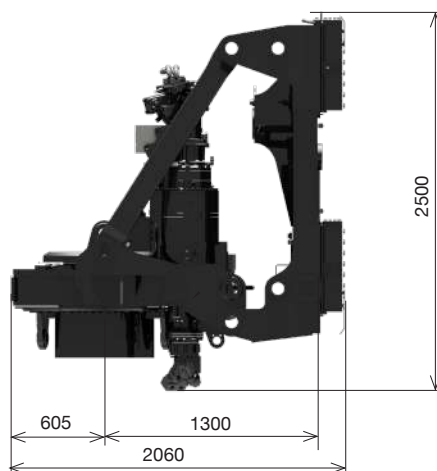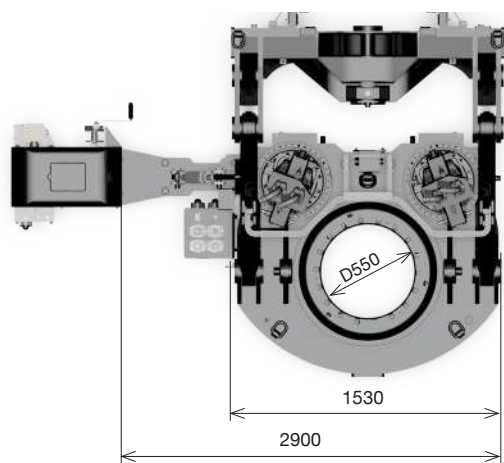

Rotary torque diagram

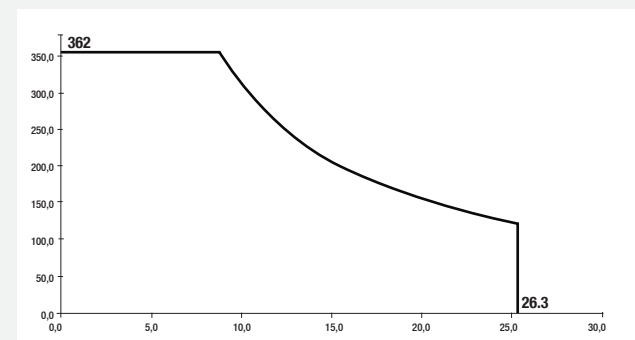

Kelly bars for rotary OD 482 mm / 19 in

Rotary motors displacement automatic controlled by DMS.

Engine power saving in a resulting lower consumption thanks the contribution of the main valve fitted on rotary



The rotary sleeve is composed of symmetrical and interchangeable ribs in order to reduce maintenance time. The inner passage is 550 mm (21.6 in) without ribs.

The variable drilling axis device (from 1100 mm to 1400 mm / 45 in to 55 in) ensures the maximum geometric clearance in front of the mast (CCS up to diameter 2700 mm / 106 in - WCS up to diameter 2500 mm / 98 in)

Type		
Max torque	362,4 kNm	267292 lbf*ft
1 st gear rated torque	342 kNm	252246 lbf*ft
Max drilling speed	25,6 rpm	25.6 rpm
Max spin off speed	120 rpm	120 rpm
Weight (w/o cradle and casing flange)	5040 kg	11111 lb

Transport, dimensions & weights

LDP - Winch Crowd System

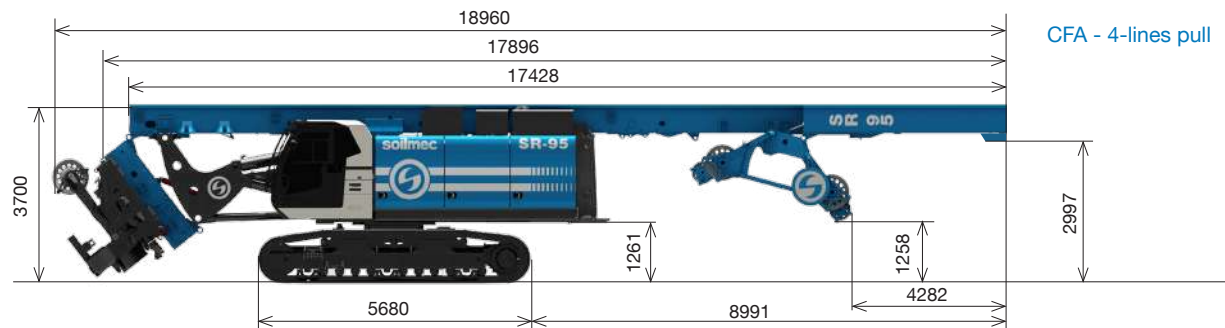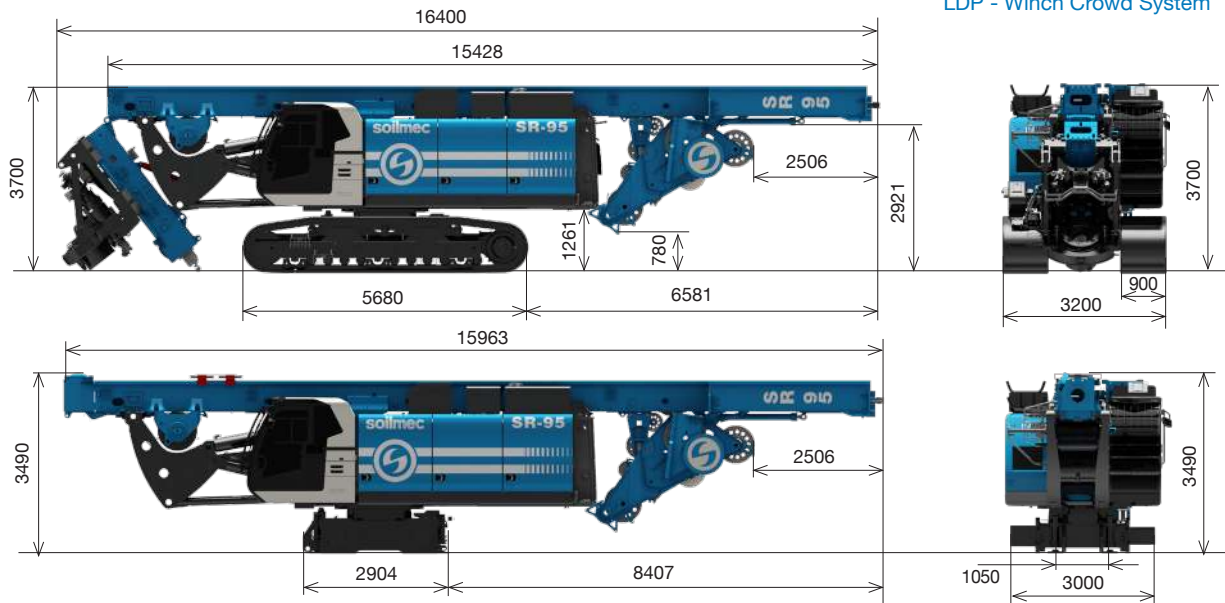


CFA - 4-lines pull

Transport configuration


Width c/w - w/o crawlers ¹	3200 - 3000 mm	126 - 118 in
Height c/w - w/o crawlers ²	3700 - 3350 mm	148 - 134 in
Length CCS version c/w rotary, w/o rotary ³	16400 - 15900 mm	646 - 626 in
Length WCS version c/w rotary, w/o rotary ³	16400 - 15900 mm	646 - 626 in
Length CFA version Quick Change - lines pull	16590 - 18960 mm	653 - 746 in
Weight CCS version c/w rotary, w/o counterweight - min configuration ⁴	72800 - 46300 kg	160496 - 102074 lb
Weight WCS version c/w rotary, w/o counterweight - min configuration ⁴	76300 - 54900 kg	168213 - 121034 lb
Weight CFA version c/w rotary, w/o counterweight - w/o rotary, counterweight, crawlers	76900 - 55200 kg	169535 - 121695 lb

¹ 3400 - 3000 (134 - 118 in) c/w special undercarriage ³ for extended version, add. 2000 mm (79 in)

² 3750 - 3400 (149 - 134 in) c/w special undercarriage ⁴ for extended version, add. 2200 kg (4850 lb)

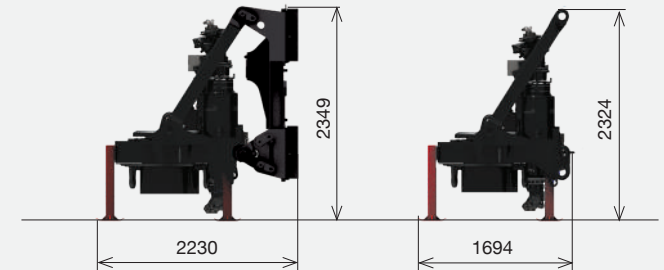

Transport configuration	Rotary	
Weight	4780 kg	14727 lb
Width w/o cradle	2456 mm	97 in

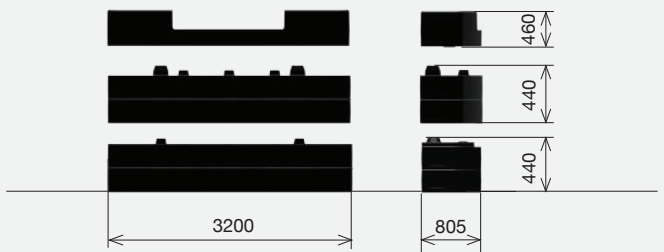

Transport configuration	Counterweight	
Transport weight	15100 kg	33289 lb
Thickness	895 mm	35 in



Transport configuration	Crawler	
Transport weight for each element ¹	8000 kg	17637 lb
Thickness	900 mm	35 in

¹ 9000 kg (19842 lb) c/w special undercarriage

Technical data

Undercarriage




Undercarriage		
Type	variable gauge, telescoping removable sides	
Overall width with retracted/extended crawlers	3200 / 4700 mm	126 / 185 in
Width of triple grouser track shoes	900 mm	35.4 in
Overall length of crawlers	5680 mm	224 in
Traction force	668 kN	150172 lbf
Travelling speed	1,9 km/h	1.2 mph

Special undercarriage - CSP & TTJ version

Type	variable gauge, telescoping removable sides	
Overall width with retracted/extended crawlers	3400 / 5000 mm	134 / 197 in
Width of triple grouser track shoes	900 mm	35.4 in
Overall length of crawlers	5968 mm	235 in
Traction force	771 kN	173328 lbf
Travelling speed	1,65 km/h	1.03 mph

Engine



Engine		
Engine model ¹	Cummins X15	
Power rating	455 kW @ 1900 rpm	610 HP @ 1900 rpm
Engine conforms to Exhaust emission Standard	EU stage V, US EPA Tier 4f	
Fuel tank capacity	870 l	230 US gal
AD Blue tank capacity	56,8 l	15 US gal

¹ CAT C15 - Tier3 is available

Hydraulic system

Main pumps flow	518 / 2x 358 l/min	137 / 2x 96 US gal/min
Auxiliary pumps flow	148 l/min	39 US gal/min
Hydraulic oil tank capacity	880 l	232 US gal

CCS_Cylinder Crowd System


Stroke	6500 mm	256 in
Crowd force pull (down/up)	280 / 365 kN	62945 / 82054 lbf
Speed up (slow/fast)	3,7 / 10,8 m/min	12 / 35.4 ft/min
Speed down (slow/fast)	3,5 / 11 m/min	11.5 / 36 ft/min

WCS_Winch Crowd System

Stroke ²	18800 mm	740 in
Crowd force pull (down/up)	484 / 484 kN	108800 / 108800 lbf
Speed up (slow/fast)	6,3 / 26,8 m/min	20.7 / 88 ft/min
Speed down (slow/fast)	6,3 / 26,8 m/min	20.7 / 88 ft/min

² stroke 21100 mm (831 in) with 3 m (10 ft) mast extension is available on request

Winches



Main winch - standard

Type	controlled descent	
Rope layers	3	3
Line pull (1 st layer)	352 kN	79133 lbf
Rope diameter	32 mm	1.26 in
Rope speed (1 st layer)	80 m/min	263 ft/min

Main winch - single layer (on request)

Type	controlled descent	
Line pull	350 kN	78683 lbf
Rope diameter	32 mm	1.26 in
Rope speed	80 m/min	263 ft/min

Auxiliary winch

Type	controlled descent	
Rope layers	2	2
Line pull (1 st layer)	134 kN	30124 lbf
Rope diameter	22 mm	0.87 in
Rope speed (1 st layer)	67,8 m/min	222 ft/min

Noise



Sound power level c/w Tier 4f Engine c/w Tier 4f EU Stage V, US EPA Engine	108 dB	108 dB
Sound pressure level in cab c/w Tier 4f EU Stage V, US EPA Engine	70 dB	70 dB
Vibration transmitted to the hand-arm system of the machine operator	< 2,5 m/s ²	< 8.2 ft/s ²
Vibration transmitted to the whole body of the machine operator	< 0,5 m/s ²	< 1.67 ft/s ²

BT-cab



BT-CAB

Soilmec BT-cab. By assessing the specific application and listening properly to the wishes and requirements of the operators, Soilmec provides the optimal operator cabin for comfort. Ergonomic seat with air suspension, fully adjustable, lumbar support, air management, as well as lines of sight, quality and safety are standard aspects considered during the design of the right configuration for the cabin.

- Cabin width 1050 mm 3.4 ft
- Sliding door, Courtesy lights, Air conditioning system and climate control unit, Radio player with USB aux port

Controls



Controls

DMS control system, developed and manufactured by Soilmec - is designed to give you a total control over performance, production and all your drilling rigs. In real time all the information relating to the operation work cycles and diagnostics of faults are shown on a multilanguage touch screen display installed in the cab. All drilling operations are actuated by two innovative joysticks. Automatic controls of rotary head and drilling phases are available on request thanks to simple implementation of our DMS system.

Configurations

UNDERCARRIAGE

Variable gauge, telescopic removable sides	●
Stabilizers cylinders	●
Hydraulic prearrangement for casing oscillator	○
Mechanical prearrangement for casing oscillator	●
VRM200KL casing oscillator	○
Radio remote control for tramming operation	●
Radio remote control for dismounting track	○
Machine anchor points for transport	●

UPPER STRUCTURE

Diesel engine CAT C15 ACERT EU Stage IIIA – US EPA Tier 3	○
Diesel engine Cummins X15 EU Stage V – US EPA Tier 4F	●
J-Eye Ai CCT Camera System	○
Hydraulic Oil condition system	○
Intelligent battery sensor	○
Start and slow system	●
Electroproportional system	●
Harness technology for electrical system	●
Automatic greasing package	○
Compressor kit	○
Washer lance	○
Removable catwalk 900 mm (35.4 in) wide c/w handrails	●
Foldable catwalk 900 mm (35.4 in) wide c/w handrails	○
Acoustic alarm for tramming	●
Lighting led system package	●
Sound proofed canopies	●
Silent pack	○
Hydraulic prearrangement for additional technologies	●

BT-CAB

Front protective grille	●
Falling object protective structure (FOPS)	●
Lower front protective grille	○
Rearview mirrors	●
Comfort packakge (cup holder, radio, A/C system, USB port & 12 V power socket, roll-up awning, courtesy lights)	●
Operator seat (air suspension, lumbar support, fully adjustable positioning, safety belt & operator presence micro-switch)	●
Sliding door	●
Sliding window	○

Lighting system in front of the cab	●
Front tools support	○

CONTROL AND MONITORING SYSTEM

DMS ON BOARD with technological package	●
DMS PC	●
DMS manager 4.0	●
GSM / GPRS / WIFI Modem	●
DMS ON BOARD adjustable monitor 12" touch screen	●
Video control by 5 cameras with display in the cab	●
Inclinometer device with automatic verticality	●

WINCHES

Main winch SW350 model - multi layers	●
Main winch SW350 model - single layer	○
Load cell for main winch	○
Limit switch for rope winding and winches	●
Depthmeter for main winch	●
Anti-slack system for main winch	○
Service winch SW130 model	●
Load cell for service winch	●
Swivel for auxiliary winch	○
Service rope holder	●

ROTARY UNIT

Rotaty unit RD 340 model Max torque intermitted: 351 kNm (258880 lbs*ft)	●
Replaceable drive ribs	●
Automatic greasing kit for cradle	●
Automatic control of motor displacement	●
Oil discharge conveying system	●

MAST

Upper foldable mast element	●
Lower foldable mast element	●
Automatic greasing package for cathead	○
Hydraulic cathead folding kit	●
Hydraulic upper mast folding kit	○
Double positioning of cylinder	●

KELLY BAR TECHNOLOGY

Rotary sleeve with 3 ribs	●
Cardan joint	●

Flange for casing driving d. 1500 mm (59 in)	●
Automatic return to the centre hole	○
Automatic greasing kit for winch crowd	○
Telescopic mast foot (only for WCS)	●
Variable Drilling axis from 1100 mm (43 in) to 1400 (55 in)	●
Package for long mast - upgraded version	○
Spin off discharging system	●
"Click-click" discharging system	●
Kelly bar guide	●

CFA TECHNOLOGY

Sleeve 6 m (19.7 in) long 25HD-5	○
Sleeve 8,5 m (27.8 in) long 25HD-5	○
Package for CFA quick change & direct quick change	●
Package for CFA 4-lines pull	○
DMS ON BOARD with automatic auger lifting	●
Concrete pipe on turret and mast	○
Autodrilling package	●
Autorotary package	●
Automatic greasing kit for sheeves block	○
Additional pull-down winch	○
Hydraulic universal openable lower guide Ø 1200mm (47.2 in)	●
Auger cleaner star type	●
Double roller auger cleaner Ø 1200 mm (47.2 in)	○
Wi-Fi pressure transducer kit for concrete line	○
Pressure transducers kit	●
Hydraulic prearrangement for VTH-1 vibrator	○
Warning system for CFA sleeve extension coupling (patent pending)	●

OTHER TECHNOLOGIES

CSP technology for 4-lines pull version	○
Special undercarriage for CSP version	○
VDW tech.for Quick Change std & Direct Quick Change version	○
DP/TCT tech.for Quick Change std and Direct Quick Change ver.	○
TJ tech.for Quick Change std and Direct Quick Change version	○

* The technology package is only referred to the machine set up in this specific version

● standard ○ optional



www.soilmec.it

This brochure has been edited and distributed by SOILMEC Spa. The present document cancels and override any previous ones. This brochure shall not be distributed, reproduced or exhibited without SOILMEC Spa. authorization in accordance with to SOILMEC web site disclaimer condition.

SOILMEC Spa distributes machinery and structures all over the world, supported by SOILMEC Spa subsidiary companies and dealers. The complete Soilmec network list is available on the web site www.soilmec.it

#muddyboots